

The background of the top section features a red tractor with a white cab, viewed from a front-three-quarter angle. The tractor is positioned in the lower half of the frame. Above the tractor, there is a large, stylized blue and white pressure gauge with a needle pointing towards the right. The gauge has markings for 'psi' and 'bar'. The overall background is a vibrant blue with abstract, swirling patterns.

IMM

Inserto standard / *Standard tail*


H
I

A close-up photograph of the rear of a tractor, showing two large, treaded tires on a white rim. The tractor is moving through a field of dry, yellowish-brown soil, which is being churned up. The background shows a blue sky and some green foliage.

IMHypress

IMM Group

● ● ● ● ● ● Inserto standard / Standard tail

Pagina / Page	8	8	9	9	10	10
Trecciato Braided	 0001 R1A - DIN 1ST	 0002 R2A - DIN 2ST (R9)	 0011 R1T - DIN 1SN (DIN 2TE)	 001C 1SC - 2SC - 1SN	 0021 R2T - DIN 2SN (DIN 3TE)	 0022 R1AT / R2AT / 2SC / R16 DIN 1SN/2SN - (R17)
Pagina / Page	11	11	11	12	12	12
Compact Compatto	 001K 1SC (R17)	Thermo plastic	 0007 R7 (R8 / R6)	Tessile Textile	 0003 SAE 100 R3 SAE 100 R5 (O4 to 16)	
Pagina / Page	12	12	13	13	13	13
Spiral	 BMC1 Spiral No Skive	 BMC2 Spiral No Skive	 0009 R9 - DIN 4SP all DIN 4SH for 12 - 16	 004H DIN 20023 4SH	PTFE	 PTFE Boccola per tubo PTFE Ferrule for PTFE hose
Pagina / Page	14	18	19	19	19	25
BSP 60°	 0350 BSP MALE 60° seat AGR	BSP 60° rolled nut	 0051 BSP FEMALE 60° R DKR	 0151 90° Swept Elbow R DKR-90°	 0251 45° Swept Elbow R DKR-45°	 2301 90° K Swept Elbow R DKR-90°K
Pagina / Page	20	21	21	22	22	26
BSP 60° thrust wire nut	 0050 BSP FEMALE 60° TW DKR	 0150 90° Swept Elbow TW DKR-90°	 0150S 90° Swept Elbow TW DKR-90°	 0250 45° Swept Elbow TW DKR-45°	 0250S 45° Swept Elbow TW DKR-45°	 2300 90° K Swept Elbow TW DKR-90°K
Pagina / Page	23	23	23	17	17	17
BSP 60° loose back nut	 0052 BSP FEMALE 60° L DKR	 0152 90° Swept Elbow L DKR-90°	 0252 45° Swept Elbow L DKR-45°	BSP flat	 0345 BSP MALE flat seat AGR-F	 0060 BSP FEMALE flat seat DKR-F

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.




Inserto standard / Standard tail

Pagina / Page	24	24	24		15
BSP 60° rolled nut O'R				BSPT Gas Con.	
	0041 BSP FEMALE 60° R DKR OR	0141 90° Swept Elbow R DKR-90° OR	0241 45° Swept Elbow R DKR-45° OR		0360 BSPT MALE 60° seat AGR-K
Pagina / Page	16	16		28	28
NPTF			BSP fixed female		
	0370 NPTF MALE 60° seat AGN	N051 NPSM FEMALE DKN		005F Dowty Seal	005R O'Ring Seal
Pagina / Page	27		26	25	15
BSP banjo		BSP 60° compact forged			
	1400 BSP BANJO RNR		2320 90° K Swept Elbow TW DKR-90° K	2321 90° K Swept Elbow R DKR-90° K	035G 60° seat - swivel AGR-RO
Pagina / Page	29		31	33	35
JIC 37°		JIC 37° rolled nut			
	0850 JIC MALE 37° AGJ		0901 JIC FEMALE 37° R DKJ	0951 90° Swept Elbow R DKJ-90°	1001 45° Swept Elbow R DKJ-45°
Pagina / Page	30	32	32	34	34
JIC 37° thrust wire nut					
	0900 JIC FEMALE 37° TW DKJ	0950 90° Swept Elbow TW DKJ-90°	0950S 90° Swept Elbow TW DKJ-90°	1000 45° Swept Elbow TW DKJ-45°	1000S 45° Swept Elbow TW DKJ-45°
Pagina / Page	37	37	37	36	36
JIC 37° loose back nut				JIC 37° compact forged	
	0902 JIC FEMALE 37° L DKJ	0952 90° Swept Elbow L DKJ-90°	1002 45° Swept Elbow L DKJ-45°	2970 90° K Swept Elbow TW DKJ-90° K	2971 90° K Swept Elbow R DKJ-90° K

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.


Inserto standard / Standard tail

Pagina / Page		38		38		38			
SAE Boss									
		0385		0390		0395			
		SAE MALE OR		SWIVEL MALE		90° SWIVEL MALE			
		SAE-OR		Boss		Boss-90°			
Pagina / Page		39		40		40			
Inverted Flare									
		IF00		IF90		IF45			
		Inverted Flare		Inverted Flare 90°		Inverted Flare 45°			
		SIF		SIF-90°		SIF-45°			
Pagina / Page		41		42		43		44	
Metric 60°									
		0400		0100		0200		0300	
		METRIC MALE 60°		FEMALE 60°		90° Swept Elbow		45° Swept Elbow	
		AGM		DKM		DKM-90°		DKM-45°	
Pagina / Page		45		47		49- 50		51 - 52	
Metric Din 24° CEL				Metric Din 24° DKOL					
		0500				0085		0185	0285
		METRIC MALE 24°				FEMALE 24° OR		90° Swept Elbow OR	45° Swept Elbow OR
		CEL				DKOL		DKOL-90°	DKOL-45°
Pagina / Page		46		48		50		52	
Metric Din 24° CES				Metric Din 24° DKOS					
		0450				0084		0184	0284
		METRIC MALE 24°				FEMALE 24° OR		90° Swept Elbow OR	45° Swept Elbow OR
		CES				DKOS		DKOS-90°	DKOS-45°
Pagina / Page		53		53		54		54	
Metric Din 24° DKL								Metric banjo	
		0035		0135		0235			1350
		FEMALE 24°		90° Swept Elbow		45° Swept Elbow			METRIC BANJO
		DKL		DKL 90°		DKL 45°			RNM

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.



Inserto standard / Standard tail

Pagina / Page		55	55	56	56		
							
	0430	0530	0030	0130			
	French MALE GAZ	Standpipe GAZ	French FEMALE GAZ	90° Swept Elbow GAZ			
	CEF	BEF	DKF	DKF-90°			
Pagina / Page		57	58	59	60	60	
							
	0550	0650	0750		FK50	FN50	
	Metric Standpipe	Metric Standpipe 90°	Metric Standpipe 45°		SWIVEL FEMALE	Insert for gun	
	BES-BEL	BES-BEL 90°	BES-BEL 45°		Karcher	Karcher	
Pagina / Page		61	61		60		
							
	KO5B		0438		0398		
	KOBELCO Metric Male		M18 for agric. valves		Staple Lock		
	KOB		CGM		STN		
Pagina / Page		63	63	64	65	62	
							
	S050	S05T	S150	S250		S350	
	ORFS FEMALE	FEMALE back Hexagon	90° Swept Elbow	45° Swept Elbow		ORFS MALE	
	ORFS	ORFS	ORFS 90°	ORFS 45°		ORFS	
Pagina / Page		66	67	67	66		
							
	0930	0980S	1030S		0920		
	JIS TOYOTA	JIS TOYOTA	JIS TOYOTA		JIS NISSAN		
	JIS-T	JIS-T 90°	JIS-T 45°		JIS-N		
Pagina / Page		68	68	69	70	70	70
							
	0940	0990S	1040S	1250	1050	1150	
	JIS KOMATSU	JIS KOMATSU	JIS KOMATSU	KOMATSU	KOMATSU 90°	KOMATSU 45°	
	JIS-K	JIS-K 90°	JIS-K 45°	JIS-KF	JIS-KF 90°	JIS-KF 45°	

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Inserto standard / Standard tail

Pagina / Page		71	71	72	72	75	
							
	1260 3000 psi SOLID	1060 3000 psi SOLID 90°	1160 3000 psi SOLID 45°	1060 3000 psi SOLID 22.5°/30°/60°/67.5°		FS3L 3000 psi SOLID 90°	
	SFL	SFL 90°	SFL 45°			SFL 90° L	
Pagina / Page		73	74	74	75		
							
	1310 6000 psi SOLID	1110 6000 psi SOLID 90°	1210 6000 psi SOLID 45°		FS6L 6000 psi SOLID 90°		
	SFS	SFS 90°	SFS 45°		SFS 90° L		
Pagina / Page		76	76	76	77		
							
	130S 9000 psi SOLID	110S 9000 psi SOLID 90°	120S 9000 psi SOLID 45°		D050 HOSE JUNCTION		
	SFC	SFC 90°	SFC 45°				
Pagina / Page		77	78				
							
	INBK Blank Insert	GS00 Weldable Fitting					

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product
Any use of the product not in conformance with our instructions may be dangerous.

Modello pre-crimpato "G"


"G" Precrimped model

Esempio di codice / Example code:

0050G12-12 Femmina Girevole 3/4" BSP * Tubo 3/4" -
Inserto Gambo Standard con boccola Pre-
Crimp "G".

*3/4" BSP Swivel Female * Hose 3/4" -
Standard Tail with "G" Pre-Crimp ferrule.*

Dati Tecnici / Technical data:

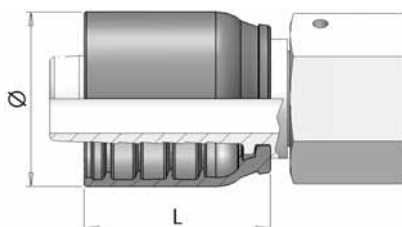

DN	Size	Dimension		Valid for Hose
		L	Ø	
06	1/4	29	23	1SN - 2SN - 1SC - 2SC
08	5/16	29	24	1SN - 2SN - 1SC - 2SC
10	3/8	32	27	1SN - 2SN - 1SC - 2SC
12	1/2	32,5	31	1SN - 2SN - 1SC - 2SC
16	5/8	34	34	1SN - 2SN - 1SC - 2SC
20	3/4	39,5	38	1SN - 2SN - 1SC - 2SC
25	1	47	47	1SN - 2SN - 1SC - 2SC
32	1.1/4	55	57,9	1SN - 2SN - 1SC - 2SC



L'azienda si riserva di non dare alcuna garanzia circa la funzionalità del prodotto presente in questa pagina al di fuori delle istruzioni in esso specificatamente contenute.

The company reserves the right not to give any guarantees about the functionality of the product on this page except of the instructions specifically contained.

Modello pre-crimpato "P"


"P" Precrimped model

Esempio di codice / Example code:

0050P12-12 Femmina Girevole 3/4" BSP * Tubo 3/4" -
Inserto Gambo Standard con boccola Pre-
Crimp "P".

*3/4" BSP Swivel Female * Hose 3/4" -
Standard Tail with "P" Pre-Crimp ferrule.*

Dati Tecnici / Technical data:

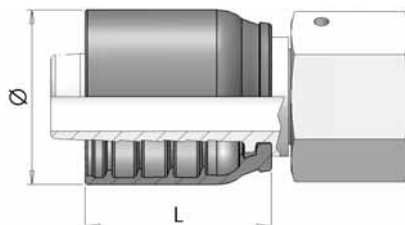

DN	Size	Dimension		Valid for Hose
		L	Ø	
06	1/4	28,4	19,9	1SC - 2SC
10	3/8	27,8	25,8	1SC - 2SC
12	1/2	29,2	29	1SC - 2SC
16	5/8	31,5	32,6	1SC - 2SC
20	3/4	31,5	36,7	1SC - 2SC
25	1	35,8	45	1SC - 2SC



L'azienda si riserva di non dare alcuna garanzia circa la funzionalità del prodotto presente in questa pagina al di fuori delle istruzioni in esso specificatamente contenute.


The company reserves the right not to give any guarantees about the functionality of the product on this page except of the instructions specifically contained.

0001 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:

R1A - 1ST




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
0001-03	3/16	4,8	17,5	27,0	10,5	20	R1A/1ST
0001-04	1/4	6,4	20,0	30,2	13,5	23	R1A/1ST
0001-05	5/16	7,9	22,0	30,7	14,4	23	R1A/1ST
0001-06	3/8	9,5	24,0	32,0	16,5	24	R1A/1ST
0001-08	1/2	12,7	28,5	34,0	20,5	25	R1A/1ST
0001-10	5/8	15,9	32,0	37,0	23,8	27	R1A/1ST
0001-12	3/4	19	36,0	43,0	27,6	31	R1A/1ST
0001-16	1	25,4	43,0	50,0	34,7	37	R1A/1ST
0001-20	1.1/4	31,8	52,0	57,0	42,4	46	R1A/1ST
0001-24	1.1/2	38,1	57,0	63,0	48,0	44	R1A/1ST
0001-32	2	50,8	70,6	78,0	61,2	60	R1A/1ST

0002 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:

R2A - 2ST - R9




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
0002-03	3/16	4,8	20,0	27,0	12,3	21	R2A/2ST
0002-04	1/4	6,4	21,0	30,0	14,1	22	R2A/2ST
0002-05	5/16	7,9	24,0	30,0	15,8	22	R2A/2ST
0002-06	3/8	9,5	25,4	32,0	18,0	24	R2A/2ST - R9
0002-08	1/2	12,7	30,0	34,0	22,0	25	R2A/2ST - R9
0002-10	5/8	15,9	34,0	37,0	25,9	27	R2A/2ST
0002-12	3/4	19	38,0	43,0	29,2	31	R2A/2ST - R9
0002-16	1	25,4	46,0	50,0	36,5	37	R2A/2ST - R9
0002-20	1.1/4	31,8	56,0	59,0	45,2	43	R2A/2ST
0002-24	1.1/2	38,1	62,0	63,0	51,9	45	R2A/2ST
0002-32	2	50,8	75,0	79,0	64,5	61	R2A/2ST
0002-40	2.1/2	63,5	95,0	83,7	82,3	63	R2A/2ST/2SC
0002-48	3	76,2	105,6	94,3	94,9	78	R2A/2ST/2SC

0011 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:

R1AT - 1SN




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
0011-03	3/16	4,8	19,0	26,0	12,8	NO	R1AT/1SN
0011-04	1/4	6,4	20,0	30,5	14,3	NO	R1AT/1SN
0011-05	5/16	7,9	22,0	30,0	15,9	NO	R1AT/1SN
0011-06	3/8	9,5	24,0	31,5	18,3	NO	R1AT/1SN
0011-16	1	25,4	43,0	50,0	36,8	NO	R1AT/1SN
0011-20	1.1/4	31,8	53,0	59,0	45,0	NO	R1AT/1SN
0011-24	1.1/2	38,1	58,0	73,0	52,0	NO	R1AT/1SN
0011-32	2	50,8	73,0	77,0	65,5	NO	R1AT/1SN

001C Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:

1SC - 2SC - 1SN




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
001C-03	3/16	4,8	19	24	13,5	NO	R17 - Pilot (TFE0P10)
001C-04	1/4	6,4	20	26	14,3	NO	1SC - 2SC - 1SN
001C-05	5/16	7,9	22	26	16,1	NO	1SC - 2SC - 1SN
001C-06	3/8	9,5	24	26	18,4	NO	1SC - 2SC - 1SN
001C-08	1/2	12,7	28	28	21,7	NO	1SC - 2SC - 1SN
001C-10	5/8	15,9	32	29	25,0	NO	1SC - 2SC - 1SN
001C-12	3/4	19	35	35	28,7	NO	1SC - 2SC - 1SN
001C-16	1	25,4	44	44	36,7	NO	1SC - 2SC - 1SN
001C-20	1.1/4	31,8	54	56	45,4	NO	2SC - 1SN

0022 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

for hose / per tubo:

R1AT - 1SN - R2AT - 2SN - 2SC - R16 - R17 (2 Trecce)




part number	hose I.D.		Dimension			skive	length	valid for
	in	mm	D	L	d			
0022-03	3/16	4,8	21,0	25,6	14,6	NO		R1AT/R2AT/2SC/R16
0022-04	1/4	6,4	22,0	28,0	15,8	NO		R1AT/R2AT/2SC/R16
0022-05	5/16	7,9	24,0	28,0	17,5	NO		R1AT/R2AT/2SC/R16
0022-06	3/8	9,5	26,5	28,0	20,0	NO		R1AT/R2AT/2SC/R16
0022-08	1/2	12,7	30,0	31,0	23,3	NO		R1AT/R2AT/2SC/R17/R16
0022-10	5/8	15,9	33,0	31,0	26,5	NO		R1AT/R2AT/2SC/R17/R16
0022-12	3/4	19	37,0	38,0	30,4	NO		R1AT/R2AT/2SC/R17/R16
0022-16	1	25,4	46,0	47,5	39,0	NO		R1AT/R2AT/2SC/R17/R16
0022-20	1.1/4	31,8	58,0	56,0	49,4	NO		R1AT/R2AT/2SC/R17/R16
0022-24	1.1/2	38,1	65,6	66,0	55,9	NO		R1AT/R2AT/2SC/R17/R16
0022-32	2	50,8	78,6	73,0	68,6	NO		R1AT/R2AT/2SC/R17/R16

001K Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:

1SC - R17 (1 treccia)

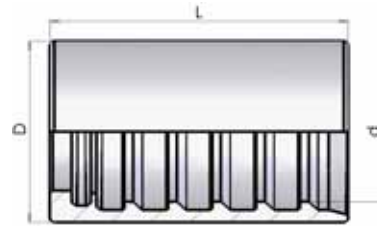


part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
001K-04H	1/4	6,4	18,0	30,0	13,0	NO	1SC - R17
001K-05	5/16	7,9	20,0	30,5	15,0	NO	1SC - R17
001K-06H	3/8	9,5	22,0	34,0	17,0	NO	1SC - R17
001K-08H	1/2	12,7	25,5	34,0	19,9	NO	1SC
001K-10H	5/8	15,9	28,0	37,0	23,0	NO	1SC
001K-12H	3/4	19	32,0	42,5	26,4	NO	1SC

0007 Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:

R7 - R8 - R6 - 1TE




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
0007-03	3/16	4,8	14,0	27,0	10,6	NO	R7-R8-1TE
0007-04	1/4	6,4	17,0	29,0	13,5	NO	R6-R7-R8-1TE
0007-05	5/16	7,9	19,0	30,0	15,2	NO	R6-R7-R8-1TE
0007-06	3/8	9,5	21,0	31,0	16,8	NO	R6-R7-R8-1TE
0007-08	1/2	12,7	25,4	34,0	20,8	NO	R6-R7-R8-1TE
0007-10	5/8	15,9	28,5	36,0	24,0	NO	R6-R7-R8-1TE
0007-12	3/4	19	32,0	36,0	27,8	NO	R7-R8-1TE
0007-16	1	25,4	40,0	50,0	34,5	NO	R7-R8-1TE

chiedere per diametri di pressatura tubo R8 / ask for R8 swaging diameters

0003 **Boccola a Pressare (non skive)**

Swaged Ferrule (no skive)

per tubo / for hose:
R3



part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
0003-03	3/16	4,8	14,0	27,0	10,6	NO	R3
0003-04	1/4	6,4	19,0	29,0	15,2	NO	R3
0003-05	5/16	7,9	22,0	30,0	18,4	NO	R3
0003-06	3/8	9,5	24,0	31,0	19,9	NO	R3
0003-08	1/2	12,7	28,5	34,0	24,7	NO	R3
0003-10	5/8	15,9	32,0	36,0	27,9	NO	R3
0003-12	3/4	19	38,0	42,0	32,6	NO	R3
0003-16	1	25,4	46,0	50,0	39,5	NO	R3
0003-20	1.1/4	31,8	52,0	57,0	46,0	NO	R3


BMC1

BMC2

Boccola a Pressare (non skive)

Swaged Ferrule (no skive)

per tubo / for hose:
4SP - 4SH - R9 - R12 - R13 - R15




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
BMC1-16	1	25,4	53,5	56,0	41,0	NO	4SP-4SH-R9-R12-R13-R15
BMC1-20	1.1/4	31,8	62,0	62,0	48,6	NO	4SH - R15 (4spiral)
BMC2-20	1.1/4	31,8	66,0	62,0	52,6	NO	4SP-R9-R12-R13-R15(6 spiral)
BMC2-24	1.1/2	38,1	73,3	70,0	59,8	NO	4SP-R9-R12-R13-R15(6 spiral)

0009 Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:

R9 - 4SP - 4SH - R12




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
0009-04	1/4	6,4	21,0	30,0	15,3	22	R9 - 4SP - R12
0009-06	3/8	9,5	25,4	33,5	18,3	26	R9 - 4SP - R12
0009-08	1/2	12,7	30,0	36,0	22,0	28	R9 - 4SP - R12
0009-10	5/8	15,9	34,0	40,0	25,7	31	R9 - 4SP - R12
0009-12	3/4	19	38,0	43,0	29,4	34	R9 - 4SP - 4SH - R12
0009-16	1	25,4	46,0	60,0	36,1	48	R9 - 4SP - 4SH - R12
0009-20	1.1/4	31,8	56,0	66,0	46,7	54	R9 - 4SP - R12
0009-24	1.1/2	38,1	67,0	76,5	55,7	62	R9 - 4SP - R12
0009-32	2	50,8	80,0	79,8	68,8	64	R9 - 4SP - R12

004H Boccola a Pressare (skive)

Swaged Ferrule (skive)

per tubo / for hose:

4SH




part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
004H-20	1.1/4	31,8	52,0	66,0	43,0	54	DIN 4SH
004H-24	1.1/2	38,1	62,0	76,5	50,4	62	DIN 4SH
004H-32	2	50,8	75,0	79,8	65,5	64	DIN 4SH

PTFE Boccola per tubo PTFE

Ferrule for PTFE hose

per tubo / for hose:


PTFE type TP1 (with std fittings)



part number	hose I.D.		Dimension			skive	valid for
	in	mm	D	L	d	length	
PTFE-03	3/16	4,8	12,7	22	9,5	No	PTFE type TP1
PTFE-04	1/4	6,4	14,4	23,9	11,1	No	PTFE type TP1
PTFE-05	5/16	7,9	17,1	24,6	13,0	No	PTFE type TP1
PTFE-06	3/8	9,5	19,0	27,4	15,0	No	PTFE type TP1
PTFE-08	1/2	12,7	22,4	28,7	18,3	No	PTFE type TP1
PTFE-10	5/8	15,9	27,0	31,7	23,1	No	PTFE type TP1
PTFE-12	3/4	19	28,7	34,5	24,8	No	PTFE type TP1
PTFE-16	1	25,4	38,1	43,6	34,3	No	PTFE type TP1

0350 Maschio BSP svas. 60°


(AGR) BSP Male Parallel 60° cone

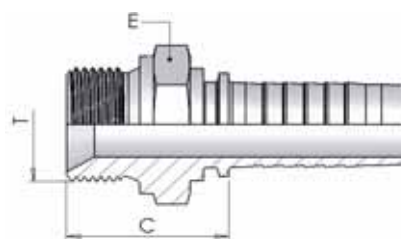

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0350-03-02	3/16	4,8	03	1/8-28	14	21
0350-03-04	3/16	4,8	03	1/4-19	19	26
0350-04-02	1/4	6,4	04	1/8-28	14	21
0350-04-04	1/4	6,4	04	1/4-19	19	27
0350-04-06	1/4	6,4	04	3/8-19	22	28
0350-04-08	1/4	6,4	04	1/2-14	27	35
0350-05-04	5/16	7,9	05	1/4-19	19	27
0350-05-06	5/16	7,9	05	3/8-19	22	28
0350-05-08	5/16	7,9	05	1/2-14	27	32
0350-06-04	3/8	9,5	06	1/4-19	19	27
0350-06-06	3/8	9,5	06	3/8-19	22	29
0350-06-08	3/8	9,5	06	1/2-14	27	32
0350-08-06	1/2	12,7	08	3/8-19	22	29
0350-08-08	1/2	12,7	08	1/2-14	27	33
0350-08-10	1/2	12,7	08	5/8-14	30	34
0350-08-12	1/2	12,7	08	3/4-14	32	35
0350-10-08	5/8	15,9	10	1/2-14	27	33
0350-10-10	5/8	15,9	10	5/8-14	30	35
0350-10-12	5/8	15,9	10	3/4-14	32	35
0350-12-12	3/4	19	12	3/4-14	32	36
0350-12-16	3/4	19	12	1-11	41	39
0350-16-16	1	25,4	16	1-11	41	40
0350-16-20	1	25,4	16	1.1/4-11	50	44
0350-20-16	1.1/4	31,8	20	1-11	41	41
0350-20-20	1.1/4	31,8	20	1.1/4-11	50	45
0350-20-24	1.1/4	31,8	20	1.1/2-11	55	46
0350-24-24	1.1/2	38,1	24	1.1/2-11	55	46
0350-24-32	1.1/2	38,1	24	2-11	70	54
0350-32-24	2	50,8	32	1.1/2-11	65	50
0350-32-32	2	50,8	32	2-11	70	54

035G Maschio BSP Svas.60° - girevole


(AGR-RO) BSP Male Parallel 60° Cone - Rotating

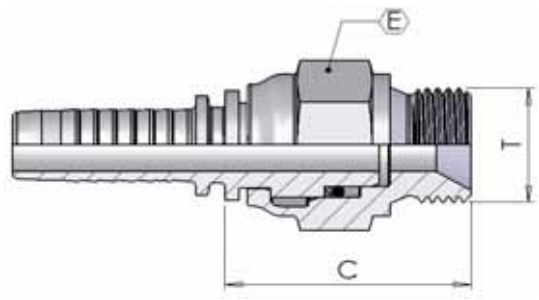

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
035G-04-04	1/4	6,4	04	1/4-19	19	37
035G-05-08	5/16	7,9	05	1/2-14	27	44
035G-06-06	3/8	9,5	06	3/8-19	22	43
035G-08-08	1/2	12,7	08	1/2-14	27	47
035G-12-12	3/4	19	12	3/4-14	32	54
035G-16-16	1	25,4	16	1-11	41	59
035G-20-20	1.1/4	31,8	20	1.1/4-11	50	63
035G-24-24	1.1/2	38,1	24	1.1/2-11	55	67
035G-32-32	2	50,8	32	2-11	65	72

0360 Maschio BSPT svas. 60°


(AGR-K) BSP Taper Male 60° cone

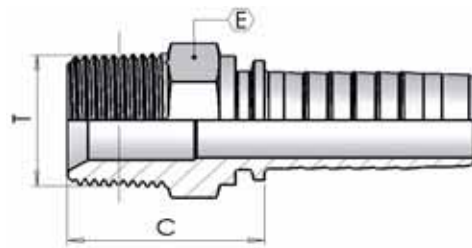

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0360-03-02	3/16	4,8	03	1/8-28	12	21
0360-03-04	3/16	4,8	03	1/4-19	15	27
0360-04-02	1/4	6,4	04	1/8-28	12	22
0360-04-04	1/4	6,4	04	1/4-19	15	28
0360-04-06	1/4	6,4	04	3/8-19	19	28
0360-05-04	5/16	7,9	05	1/4-19	15	28
0360-05-06	5/16	7,9	05	3/8-19	19	28
0360-06-04	3/8	9,5	06	1/4-19	17	28
0360-06-06	3/8	9,5	06	3/8-19	19	28
0360-06-08	3/8	9,5	06	1/2-14	22	33
0360-08-06	1/2	12,7	08	3/8-19	19	29
0360-08-08	1/2	12,7	08	1/2-14	22	34
0360-08-12	1/2	12,7	08	3/4-14	27	36
0360-10-08	5/8	15,9	10	1/2-14	22	34
0360-10-10	5/8	15,9	10	5/8-14	24	35
0360-10-12	5/8	15,9	10	3/4-14	27	36
0360-12-12	3/4	19	12	3/4-14	27	37
0360-12-16	3/4	19	12	1-11	36	43
0360-16-16	1	25,4	16	1-11	36	44
0360-16-20	1	25,4	16	1.1/4-11	46	46
0360-20-20	1.1/4	31,8	20	1.1/4-11	46	47
0360-20-24	1.1/4	31,8	20	1.1/2-11	50	49
0360-24-24	1.1/2	38,1	24	1.1/2-11	50	49
0360-24-32	1.1/2	38,1	24	2-11	65	55
0360-32-32	2	50,8	32	2-11	65	55

0370 Maschio NPTF svas. 60°


(AGN) NPTF Male 60° cone

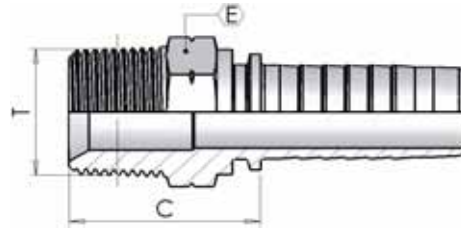

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0370-03-02	3/16	4,8	03	1/8-27	12	22
0370-03-04	3/16	4,8	03	1/4-18	15	27
0370-04-02	1/4	6,4	04	1/8-27	12	22
0370-04-04	1/4	6,4	04	1/4-18	15	28
0370-04-06	1/4	6,4	04	3/8-18	19	28
0370-05-04	5/16	7,9	05	1/4-18	15	28
0370-05-06	5/16	7,9	05	3/8-18	19	28
0370-05-08	5/16	7,9	05	1/2-14	22	34
0370-06-04	3/8	9,5	06	1/4-18	17	28
0370-06-06	3/8	9,5	06	3/8-18	19	28
0370-06-08	3/8	9,5	06	1/2-14	22	34
0370-08-06	1/2	12,7	08	3/8-18	19	29
0370-08-08	1/2	12,7	08	1/2-14	22	35
0370-08-12	1/2	12,7	08	3/4-14	27	36
0370-10-08	5/8	15,9	10	1/2-14	24	35
0370-10-12	5/8	15,9	10	3/4-14	27	36
0370-12-08	3/4	19	12	1/2-14	24	36
0370-12-12	3/4	19	12	3/4-14	27	37
0370-12-16	3/4	19	12	1-11.1/2	36	43
0370-16-16	1	25,4	16	1-11.1/2	36	44
0370-16-20	1	25,4	16	1.1/4-11.1/2	46	46
0370-20-16	1.1/4	31,8	20	1-11.1/2	41	45
0370-20-20	1.1/4	31,8	20	1.1/4-11.1/2	46	47
0370-24-24	1.1/2	38,1	24	1.1/2-11.1/2	50	49
0370-32-32	2	50,8	32	2-11.1/2	65	55
0370-40-40	2.1/2	63,5	40	2.1/2-8	80	55
0370-48-48	3	76,2	48	3-8	90	58

N051 Femmina NPSM cono 60° dado rullato


(DKN) NPSM Female 60° Cone Rolled Nut

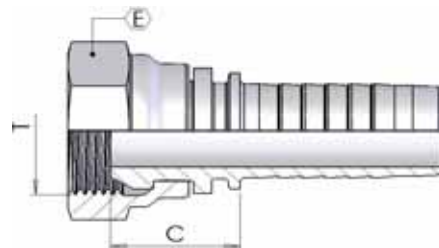

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
N051-03-04	3/16	4,8	03	1/4-18	19	17
N051-04-04	1/4	6,4	04	1/4-18	19	17
N051-06-06	3/8	9,5	06	3/8-18	22	19
N051-08-08	1/2	12,7	08	1/2-14	27	23

0345 Maschio BSP - Sede Piana


(AGR-F) BSP Male - Flat Seat

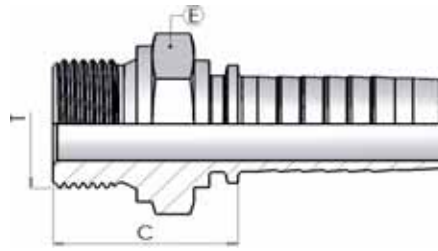

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0345-03-02	3/16	4,8	03	1/8-28	14	21
0345-04-04	1/4	6,4	04	1/4-19	19	27
0345-04-06	1/4	6,4	04	3/8-19	22	28
0345-05-06	5/16	7,9	05	3/8-19	22	28
0345-06-06	3/8	9,5	06	3/8-19	22	29
0345-06-08	3/8	9,5	06	1/2-14	27	32
0345-08-08	1/2	12,7	08	1/2-14	27	33
0345-08-10	1/2	12,7	08	5/8-14	30	35
0345-08-12	1/2	12,7	08	3/4-14	32	35
0345-10-10	5/8	15,9	10	5/8-14	30	35
0345-10-12	5/8	15,9	10	3/4-14	32	35
0345-12-12	3/4	19	12	3/4-14	32	36
0345-12-16	3/4	19	12	1-11	41	39
0345-16-16	1	25,4	16	1-11	41	40

0060 Femmina BSP Sede Piana

(DKR-F) BSP Female Flat Seal

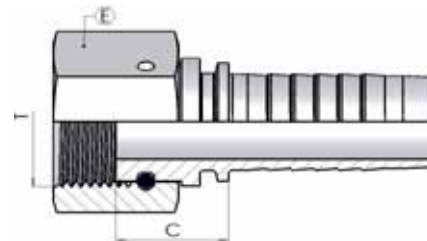


part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0060-04-04	1/4	6,4	04	1/4-19	19	14
0060-04-06	1/4	6,4	04	3/8-19	22	15
0060-05-04	5/16	7,9	05	1/4-19	19	14
0060-05-06	5/16	7,9	05	3/8-19	22	15
0060-05-08	5/16	7,9	05	1/2-14	27	17
0060-06-06	3/8	9,5	06	3/8-19	22	15
0060-06-08	3/8	9,5	06	1/2-14	27	16
0060-08-08	1/2	12,7	08	1/2-14	27	16
0060-08-10	1/2	12,7	08	5/8-14	30	16
0060-08-12	1/2	12,7	08	3/4-14	32	23
0060-10-10	5/8	15,9	10	5/8-14	30	16
0060-10-12	5/8	15,9	10	3/4-14	32	20
0060-12-12	3/4	19	12	3/4-14	32	21
0060-12-16	3/4	19	12	1-11	38	23
0060-16-16	1	25,4	16	1-11	38	22
0060-24-24	1.1/2	38,1	24	1.1/2-11	55	27

0051 Femmina BSP cono 60° Dado Rullato

(DKR)


BSP Female 60° Cone Rolled Nut

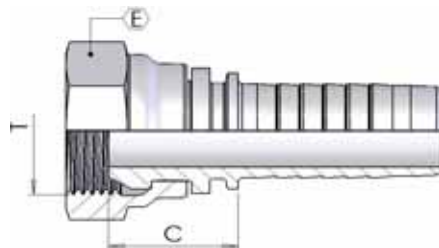

part number	hose I.D.		Dimension			
			dash size	thread T	hex E	cut-off C
0051-03-02	3/16	4,8	03	1/8-28	14	15
0051-03-04	3/16	4,8	03	1/4-19	19	17
0051-04-02	1/4	6,4	04	1/8-28	14	15
0051-04-04	1/4	6,4	04	1/4-19	19	17
0051-04-06	1/4	6,4	04	3/8-19	22	19
0051-04-08	1/4	6,4	04	1/2-14	27	22
0051-05-04	5/16	7,9	05	1/4-19	19	17
0051-05-06	5/16	7,9	05	3/8-19	22	19
0051-05-08	5/16	7,9	05	1/2-14	27	22
0051-06-04	3/8	9,5	06	1/4-19	19	17
0051-06-06	3/8	9,5	06	3/8-19	22	19
0051-06-08	3/8	9,5	06	1/2-14	27	22
0051-08-06	1/2	12,7	08	3/8-19	22	20
0051-08-08	1/2	12,7	08	1/2-14	27	23
0051-08-10	1/2	12,7	08	5/8-14	30	20
0051-08-12	1/2	12,7	08	3/4-14	32	27
0051-10-08	5/8	15,9	10	1/2-14	27	23
0051-10-10	5/8	15,9	10	5/8-14	30	20
0051-10-12	5/8	15,9	10	3/4-14	32	25
0051-12-12	3/4	19	12	3/4-14	32	25
0051-12-16	3/4	19	12	1-11	38	26
0051-16-16	1	25,4	16	1-11	38	27

0151 Curva BSP 90° cono 60° Dado Rullato


(DKR 90°) BSP 90° Swept Elbow 60° Cone Rolled Nut

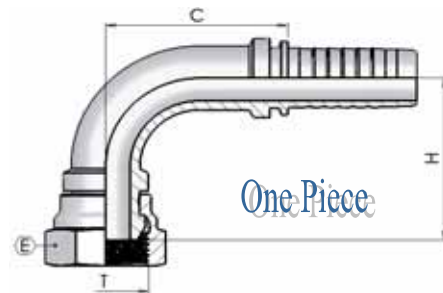

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0151-03-02	3/16	4,8	03	1/8-28	14	23	22
0151-03-04	3/16	4,8	03	1/4-19	19	25	22
0151-04-02	1/4	6,4	04	1/8-28	14	25	25
0151-04-04	1/4	6,4	04	1/4-19	19	27	25
0151-04-06	1/4	6,4	04	3/8-19	22	31	25
0151-05-06	5/16	7,9	05	3/8-19	22	36	29
0151-06-06	3/8	9,5	06	3/8-19	22	35	33
0151-06-08	3/8	9,5	06	1/2-14	27	40	31
0151-08-08	1/2	12,7	08	1/2-14	27	41	39
0151-08-10	1/2	12,7	08	5/8-14	30	41	41
0151-08-12	1/2	12,7	08	3/4-14	32	46	41
0151-10-10	5/8	15,9	10	5/8-14	30	43	43
0151-10-12	5/8	15,9	10	3/4-14	32	50	45
0151-12-12	3/4	19	12	3/4-14	32	57	56
0151-12-16	3/4	19	12	1-11	38	60	56
0151-16-16	1	25,4	16	1-11	38	67	70

0251 Curva BSP 45° cono 60° Dado Rullato


(DKR 45°) BSP 45° Swept Elbow 60° Cone Rolled Nut

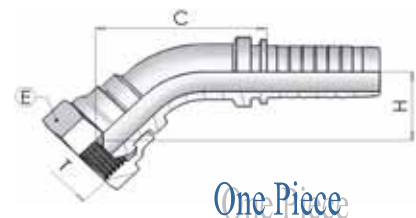

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0251-03-02	3/16	4,8	03	1/8-28	14	15	33
0251-03-04	3/16	4,8	03	1/4-19	19	15	35
0251-04-02	1/4	6,4	04	1/8-28	14	14	40
0251-04-04	1/4	6,4	04	1/4-19	19	15	41
0251-04-06	1/4	6,4	04	3/8-19	22	18	44
0251-05-06	5/16	7,9	05	3/8-19	22	19	51
0251-06-06	3/8	9,5	06	3/8-19	22	19	52
0251-06-08	3/8	9,5	06	1/2-14	27	21	55
0251-08-08	1/2	12,7	08	1/2-14	27	24	65
0251-08-10	1/2	12,7	08	5/8-14	30	21	96
0251-08-12	1/2	12,7	08	3/4-14	32	25	70
0251-10-10	5/8	15,9	10	5/8-14	30	23	68
0251-10-12	5/8	15,9	10	3/4-14	32	27	72
0251-12-12	3/4	19,0	12	3/4-14	32	30	86
0251-12-16	3/4	19,0	12	1-11	38	32	88
0251-16-16	1	25,4	16	1-11	38	35	107

0050 Femmina BSP cono 60° Dado Spinato

(DKR) BSP Female 60° cone Thrust Wire

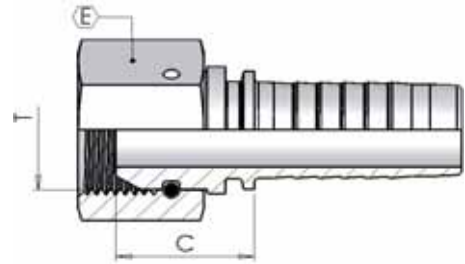

O-Ring

(*) - Femmina BSP con O-Ring

(*) - BSP female with O-Ring

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0050-03-02	3/16	4,8	03	1/8-28	14	15
0050-03-04	3/16	4,8	03	1/4-19	19	17
0050-04-02	1/4	6,4	04	1/8-28	14	15
0050-04-04	1/4	6,4	04	1/4-19	19	17
0050-04-06	1/4	6,4	04	3/8-19	22	19
0050-04-08	1/4	6,4	04	1/2-14	27	22
0050-05-04	5/16	7,9	05	1/4-19	19	17
0050-05-06	5/16	7,9	05	3/8-19	22	19
0050-06-04	3/8	9,5	06	1/4-19	19	17
0050-06-06	3/8	9,5	06	3/8-19	22	19
0050-06-08	3/8	9,5	06	1/2-14	27	22
0050-08-06	1/2	12,7	08	3/8-19	22	20
0050-08-08	1/2	12,7	08	1/2-14	27	23
0050-08-10	1/2	12,7	08	5/8-14	30	20
0050-08-12	1/2	12,7	08	3/4-14	32	27
0050-10-10	5/8	15,9	10	5/8-14	30	20
0050-10-12	5/8	15,9	10	3/4-14	32	25
0050-12-08	3/4	19	12	1/2-14	27	24
0050-12-12	3/4	19	12	3/4-14	32	25
(*) 0050-12-16	3/4	19	12	1-11	38	26
0050-16-12	1	25,4	16	3/4-14	32	27
(*) 0050-16-16	1	25,4	16	1-11	38	27
(*) 0050-16-20	1	25,4	16	1.1/4-11	50	30
(*) 0050-20-20	1.1/4	31,8	20	1.1/4-11	50	32
005X-20-20	1.1/4	31,8	20	1.1/4-11	50	32
(*) 0050-20-24	1.1/4	31,8	20	1.1/2-11	55	34
(*) 0050-24-24	1.1/2	38,1	24	1.1/2-11	55	34
005X-24-24	1.1/2	38,1	24	1.1/2-11	55	34
(*) 0050-24-32	1.1/2	38,1	24	2-11	70	34
(*) 0050-32-32	2	50,8	32	2-11	70	31
005X-32-32	2	50,8	32	2-11	70	31
0050-40-40	2.1/2	63,5	40	2.1/2-11	85	41
0050-48-48	3	76,2	48	3-11	100	45

0150 Curva BSP 90° cono 60° Dado Spinato


(DKR 90°) BSP 90° Swept Elbow 60° cone Thrust Wire



O-Ring

(*) - Femmina BSP con O-Ring

(*) - BSP female with O-Ring

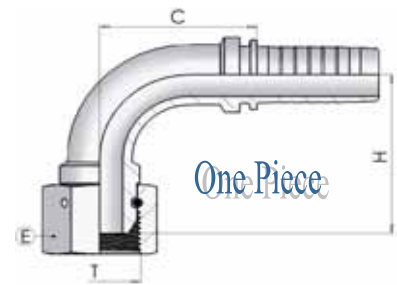

part number	hose I.D.		Dimension				
	in	mm	dash size	thread T	hex E	drop H	cut-off C
0150-03-02	3/16	4,8	03	1/8-28	14	23	22
0150-03-04	3/16	4,8	03	1/4-19	19	25	22
0150-04-02	1/4	6,4	04	1/8-28	14	25	25
0150-04-04	1/4	6,4	04	1/4-19	19	27	25
0150-04-06	1/4	6,4	04	3/8-19	22	31	25
0150-05-04	5/16	7,9	05	1/4-19	19	31	31
0150-05-06	5/16	7,9	05	3/8-19	22	36	29
0150-06-04	3/8	9,5	06	1/4-19	19	33	31
0150-06-06	3/8	9,5	06	3/8-19	22	35	33
0150-06-08	3/8	9,5	06	1/2-14	27	40	31
0150-08-06	1/2	12,7	08	3/8-19	22	42	39
0150-08-08	1/2	12,7	08	1/2-14	27	41	39
0150-08-10	1/2	12,7	08	5/8-14	30	42	39
0150-08-12	1/2	12,7	08	3/4-14	32	46	41
0150-10-10	5/8	15,9	10	5/8-14	30	43	43
0150-10-12	5/8	15,9	10	3/4-14	32	50	45
0150-12-12	3/4	19	12	3/4-14	32	57	56
(*) 0150-12-16	3/4	19	12	1-11	38	60	56
(*) 0150-16-16	1	25,4	16	1-11	38	67	70
(*) 0150-20-20	1.1/4	31,8	20	1.1/4-11	50	81	86
015X-20-20	1.1/4	31,8	20	1.1/4-11	50	81	86
(*) 0150-24-24	1.1/2	38,1	24	1.1/2-11	55	95	103
015X-24-24	1.1/2	38,1	24	1.1/2-11	55	95	103
(*) 0150-32-32	2	50,8	32	2-11	70	135	122
015X-32-32	2	50,8	32	2-11	70	135	122

0150S Curva BSP 90° cono 60° Dado Spinato (saldata)


(DKR 90°) BSP 90° Swept Elbow 60° cone Thrust Wire (welded)



O-Ring

(*) - Femmina BSP con O-Ring

(*) - BSP female with O-Ring

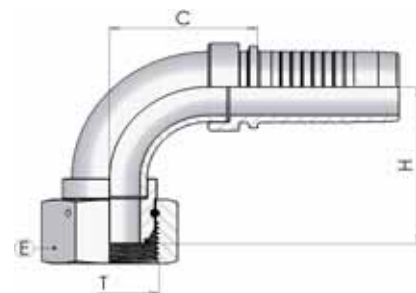

part number	hose I.D.		Dimension				
	in	mm	dash size	thread T	hex E	drop H	cut-off C
0150S08-06	1/2	12,7	08	3/8-19	22	37	31
0150S16-12	1	25,4	16	3/4-14	32	68	57
0150S16-16	1	25,4	16	1-11	38	69	57
(*) 0150S16-20	1	25,4	16	1.1/4-11	50	72	62
(*) 0150S20-20	1.1/4	31,8	20	1.1/4-11	50	72	63
(*) 0150S20-24	1.1/4	31,8	20	1.1/2-11	55	89	81
(*) 0150S24-24	1.1/2	38,1	24	1.1/2-11	55	89	80
(*) 0150S24-32	1.1/2	38,1	24	2-11	70	113	102
(*) 0150S32-32	2	50,8	32	2-11	70	113	103

0250 Curva BSP 45° cono 60° Dado Spinato


(DKR 45°) BSP 45° Swept Elbow 60° cone Thrust Wire



O-Ring

(*) - Femmina BSP con O-Ring

(*) - BSP female with O-Ring

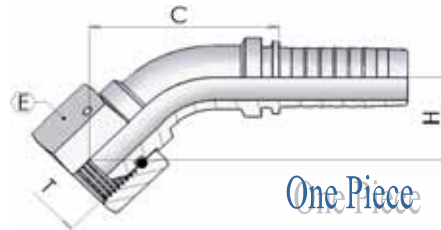

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
0250-03-02	3/16	4,8	03	1/8-28	14	15	33
0250-03-04	3/16	4,8	03	1/4-19	19	15	35
0250-04-02	1/4	6,4	04	1/8-28	14	14	40
0250-04-04	1/4	6,4	04	1/4-19	19	15	41
0250-04-06	1/4	6,4	04	3/8-19	22	18	44
0250-05-04	5/16	7,9	05	1/4-19	19	18	47
0250-05-06	5/16	7,9	05	3/8-19	22	19	51
0250-06-04	3/8	9,5	06	1/4-19	19	16	50
0250-06-06	3/8	9,5	06	3/8-19	22	19	52
0250-06-08	3/8	9,5	06	1/2-14	27	21	55
0250-08-06	1/2	12,7	08	3/8-19	22	22	63
0250-08-08	1/2	12,7	08	1/2-14	27	24	65
0250-08-10	1/2	12,7	08	5/8-14	30	21	64
0250-08-12	1/2	12,7	08	3/4-14	32	25	70
0250-10-10	5/8	15,9	10	5/8-14	30	23	68
0250-10-12	5/8	15,9	10	3/4-14	32	27	72
0250-12-12	3/4	19	12	3/4-14	32	30	86
(*) 0250-12-16	3/4	19	12	1-11	38	32	88
(*) 0250-16-16	1	25,4	16	1-11	38	35	107
(*) 0250-20-20	1.1/4	31,8	20	1.1/4-11	50	40	107
(*) 0250-24-24	1.1/2	38,1	24	1.1/2-11	55	47	117
(*) 0250-32-32	2	50,8	32	2-11	70	65	142

0250S Curva BSP 45° cono 60° Dado Spinato (saldata)


(DKR 45°) BSP 45° Swept Elbow 60° cone Thrust Wire (welded)



O-Ring

(*) - Femmina BSP con O-Ring

(*) - BSP female with O-Ring

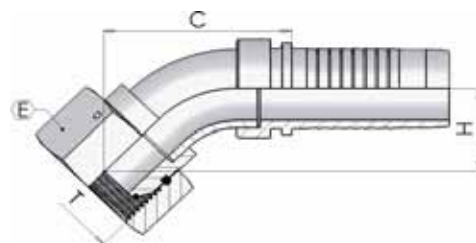


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
(*) 0250S16-20	1	25,4	16	1.1/4-11	50	33	70
(*) 0250S20-20	1.1/4	31,8	20	1.1/4-11	50	33	71
(*) 0250S20-24	1.1/4	31,8	20	1.1/2-11	55	41	91
(*) 0250S24-24	1.1/2	38,1	24	1.1/2-11	55	41	90
(*) 0250S24-32	1.1/2	38,1	24	2-11	70	53	114
(*) 0250S32-32	2	50,8	32	2-11	70	53	114

0052 Femmina BSP cono 60° Dado Libero

(DKR)

BSP Female 60° Cone Slip On Nut

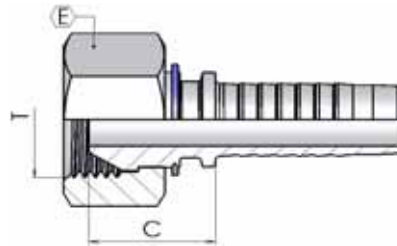


part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0052-04-04	1/4	6,4	04	1/4-19	17	17
0052-06-06	3/8	9,5	06	3/8-19	19	17
0052-08-08	1/2	12,7	08	1/2-14	27	21

0152 Curva BSP 90° cono 60° Dado Libero

(DKR 90°)

BSP 90° Swept Elbow 60° Cone Slip On Nut

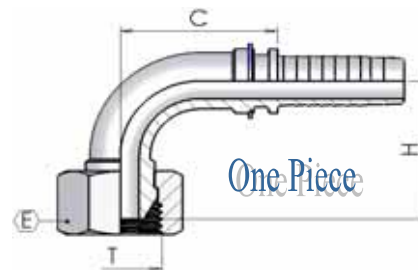


part number	hose I.D.		Dimension				
			dash size	thread	hex	drop	cut-off
	in	mm		T	E	H	C
0152-04-04	1/4	6,4	04	1/4-19	17	26	25
0152-06-06	3/8	9,5	06	3/8-19	19	30	34
0152-08-08	1/2	12,7	08	1/2-14	27	38	42

0252 Curva BSP 45° cono 60° Dado Libero

(DKR 45°)


BSP 45° Swept Elbow 60° Cone Slip On Nut

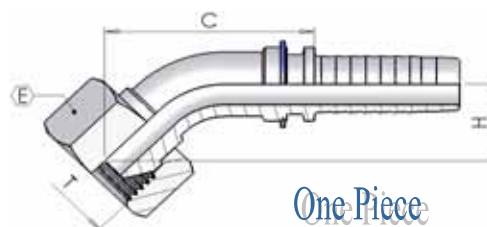

part number	hose I.D.		Dimension				
			dash size	thread	hex	drop	cut-off
	in	mm		T	E	H	C
0252-04-04	1/4	6,4	04	1/4-19	17	15	41
0252-06-06	3/8	9,5	06	3/8-19	19	15	34
0252-08-08	1/2	12,7	08	1/2-14	27	19	61

0041 Femmina BSP cono 60° con O'Ring


(DKR-OR) BSP O'Ring Female 60° Cone

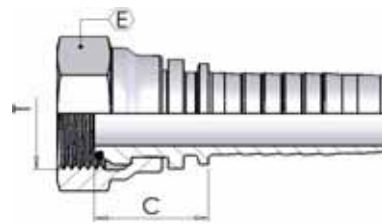

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0041-04-04	1/4	6,4	04	1/4-19	19	17
0041-06-06	3/8	9,5	06	3/8-19	22	19
0041-08-08	1/2	12,7	08	1/2-14	27	21
0041-10-10	5/8	15,9	10	5/8-14	30	21
0041-12-12	3/4	19	12	3/4-14	32	26
0041-16-16	1	25,4	16	1-11	38	28

0141 Curva BSP 90° cono 60° con O'Ring


(DKR-OR 90°) BSP O'Ring 90° Swept Elbow 60° Cone

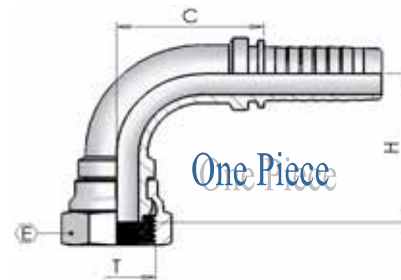

part number	hose I.D.		Dimension				
			dash size	thread	hex	drop	cut-off
	in	mm		T	E	H	C
0141-04-04	1/4	6,4	04	1/4-19	19	27	25
0141-06-06	3/8	9,5	06	3/8-19	22	34	33
0141-08-08	1/2	12,7	08	1/2-14	27	40	41
0141-10-10	5/8	15,9	10	5/8-14	30	46	43
0141-12-12	3/4	19	12	3/4-14	32	54	56
0141-16-16	1	25,4	16	1-11	38	67	70

0241 Curva BSP 45° cono 60° con O'Ring


(DKR-OR 45°) BSP O'Ring 45° Swept Elbow 60° Cone

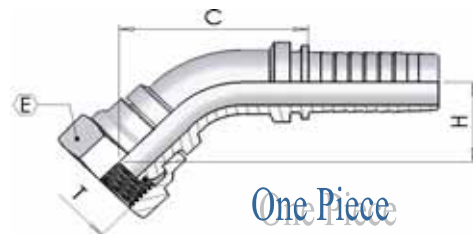

part number	hose I.D.		Dimension				
			dash size	thread	hex	drop	cut-off
	in	mm		T	E	H	C
0241-04-04	1/4	6,4	04	1/4-19	19	15	41
0241-06-06	3/8	9,5	06	3/8-19	22	21	52
0241-08-08	1/2	12,7	08	1/2-14	27	22	63
0241-10-10	5/8	15,9	10	5/8-14	30	23	68
0241-12-12	3/4	19	12	3/4-14	32	28	88
0241-16-16	1	25,4	16	1-11	38	33	105

2321 Compatta BSP 90° cono 60° (forgiata)


(DKR 90°K) BSP 90° Compact Elbow 60° Cone (forged)

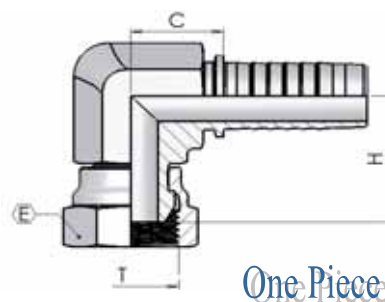

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
2321-04-04	1/4	6,4	04	1/4-19	19	20	19
2321-04-06	1/4	6,4	04	3/8-19	22	29	24
2321-05-06	5/16	7,9	05	3/8-19	22	29	24
2321-06-06	3/8	9,5	06	3/8-19	22	23	23
2321-06-08	3/8	9,5	06	1/2-14	27	26	28
2321-08-06	1/2	12,7	08	3/8-19	22	30	28
2321-08-08	1/2	12,7	08	1/2-14	27	27	26
2321-12-12	3/4	19	12	3/4-14	32	32	32
2321-16-16	1	25,4	16	1-11	38	36	38

2301 Compatta BSP 90° cono 60° (saldata)

(DKR 90°K) BSP 90° Compact Elbow 60° Cone (welded)

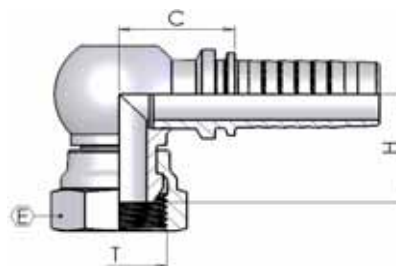


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
2301-03-02	3/16	4,8	03	1/8-28	14	16	17
2301-10-10	5/8	15,9	10	5/8-14	28	27	30
2301-10-12	5/8	15,9	10	3/4-14	32	32	29

2320

Compatta BSP 90° cono 60° dado spinato (forgiata)

(DKR 90°K)

BSP 90° Compact Elbow 60° Cone Thrust Wire (forged)

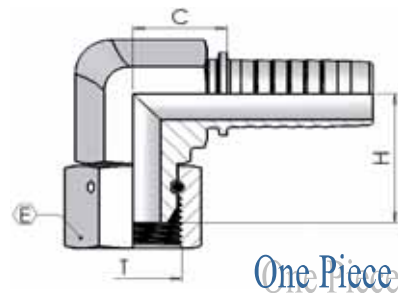


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
2320-04-04	1/4	6,4	04	1/4-19	19	20	19
2320-04-06	1/4	6,4	04	3/8-19	22	29	24
2320-05-06	5/16	7,9	05	3/8-19	22	29	24
2320-06-06	3/8	9,5	06	3/8-19	22	23	23
2320-06-08	3/8	9,5	06	1/2-14	27	26	28
2320-08-06	1/2	12,7	08	3/8-19	22	30	28
2320-08-08	1/2	12,7	08	1/2-14	27	27	26
2320-12-12	3/4	19	12	3/4-14	32	32	32
2320-16-16	1	25,4	16	1-11	38	36	38

2300

Compatta BSP 90° cono 60° Dado Spinato (saldata)

(DKR 90°K)


BSP 90° Compact Elbow 60° Cone Thrust Wire (welded)

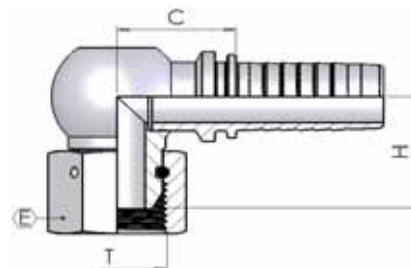

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
2300-03-02	3/16	4,8	03	1/8-28	14	16	17
2300-08-12	1/2	12,7	08	3/4-14	32	32	34
2300-10-10	5/8	15,9	10	5/8-14	30	27	30
2300-10-12	5/8	15,9	10	3/4-14	32	33	34
2300-12-16	3/4	19	12	1-11	38	36	40
2300-20-20	1.1/4	31,8	20	1.1/4-11	50	46	47

1400 Occhio a Pressare BSP

(RNR) BSP Banjo

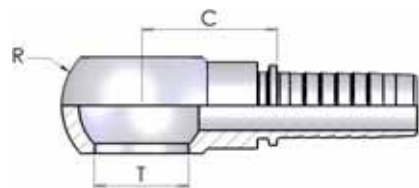


One Piece

part number	hose I.D.		Dimension				
			dash size	hole		R	cut-off C
	in	mm		T	mm		
1400-03-02	3/16	4,8	03	1/8-28	10,2	17	19
1400-03-04	3/16	4,8	03	1/4-19	13,3	24	26
1400-04-02	1/4	6,4	04	1/8-28	10,2	17	25
1400-04-04	1/4	6,4	04	1/4-19	13,3	24	26
1400-04-06	1/4	6,4	04	3/8-19	17,0	28	26
1400-05-04	5/16	7,9	05	1/4-19	13,3	24	26
1400-05-06	5/16	7,9	05	3/8-19	17,0	28	26
1400-06-04	3/8	9,5	06	1/4-19	13,3	24	26
1400-06-06	3/8	9,5	06	3/8-19	17,0	28	26
1400-06-08	3/8	9,5	06	1/2-14	21,2	36	31
1400-08-06	1/2	12,7	08	3/8-19	14,0	28	27
1400-08-08	1/2	12,7	08	1/2-14	21,2	36	31
1400-08-10	1/2	12,7	08	5/8-14	23,1	38	29
1400-08-12	1/2	12,7	08	3/4-14	26,5	45	38
1400-10-10	5/8	15,9	10	5/8-14	23,1	39	29
1400-10-12	5/8	15,9	10	3/4-14	26,5	45	38
1400-12-12	3/4	19	12	3/4-14	26,5	45	38
1400-12-16	3/4	19	12	1-11	33,5	58	49
1400-16-16	1	25,4	16	1-11	33,5	58	50

005F Femmina Fissa BSP per Rondella


BSPP Fixed Female Dowty Seal

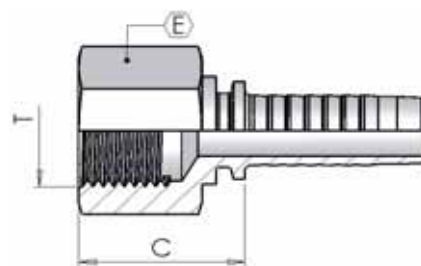

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
005F-04-04	1/4	6,4	04	1/4-19	19	28
005F-06-06	3/8	9,5	06	3/8-19	22	23
005F-08-08	1/2	12,7	08	1/2-14	27	29
005F-12-12	3/4	19	12	3/4-14	32	33
005F-16-16	1	25,4	16	1-11	41	36
005F-20-20	1.1/4	31,8	20	1.1/4-11	50	41
005F-24-24	1.1/2	38,1	24	1.1/2-11	55	43
005F-32-32	2	50,8	32	2-11	65	45

005R Femmina Fissa BSP per O'Ring


BSPP Fixed Female O'Ring Seal

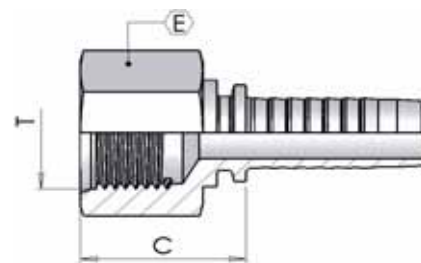

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
005R-04-04	1/4	6,4	04	1/4-19	19	28
005R-06-06	3/8	9,5	06	3/8-19	22	23
005R-08-08	1/2	12,7	08	1/2-14	27	29
005R-12-12	3/4	19,0	12	3/4-14	32	33
005R-16-16	1	25,4	16	1-11	41	36
005R-20-20	1.1/4	31,8	20	1.1/4-11	50	41
005R-24-24	1.1/2	38,1	24	1.1/2-11	55	43
005R-32-32	2	50,8	32	2-11	65	45

0850 Maschio JIC cono 74°


(AGJ) JIC Male 74° cone

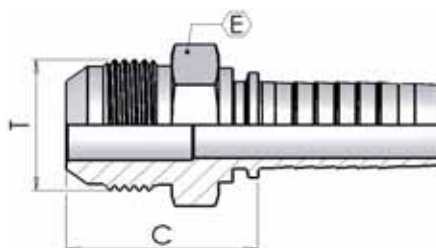

part number	hose I.D.		Dimension				
			dash size	thread		hex	cut-off
	in	mm		T		E	C
0850-03-04	3/16	4,8	03	7/16-20		12	26
0850-04-04	1/4	6,4	04	7/16-20		12	27
0850-04-05	1/4	6,4	04	1/2-20		14	27
0850-04-06	1/4	6,4	04	9/16-18		15	27
0850-05-05	5/16	7,9	05	1/2-20		14	27
0850-05-06	5/16	7,9	05	9/16-18		15	27
0850-05-08	5/16	7,9	05	3/4-16		19	30
0850-06-06	3/8	9,5	06	9/16-18		15	27
0850-06-07	3/8	9,5	06	5/8-18	*SAE 45°	17	30
0850-06-08	3/8	9,5	06	3/4-16		19	30
0850-06-10	3/8	9,5	06	7/8-14		24	34
0850-08-06	1/2	12,7	08	9/16-18		19	28
0850-08-08	1/2	12,7	08	3/4-16		19	31
0850-08-10	1/2	12,7	08	7/8-14		24	35
0850-08-12	1/2	12,7	08	1.1/16-12		27	37
0850-10-10	5/8	15,9	10	7/8-14		24	35
0850-10-12	5/8	15,9	10	1.1/16-12		27	37
0850-12-10	3/4	19	12	7/8-14		24	36
0850-12-12	3/4	19	12	1.1/16-12		27	38
0850-12-14	3/4	19	12	1.3/16-12		32	41
0850-12-16	3/4	19	12	1.5/16-12		34	42
0850-12-20	3/4	19	12	1.5/8-12		42	45
0850-16-12	1	25,4	16	1.1/16-12		27	39
0850-16-14	1	25,4	16	1.3/16-12		32	42
0850-16-16	1	25,4	16	1.5/16-12		34	43
0850-16-20	1	25,4	16	1.5/8-12		42	46
0850-20-20	1.1/4	31,8	20	1.5/8-12		42	47
0850-20-24	1.1/4	31,8	20	1.7/8-12		50	52
0850-24-24	1.1/2	38,1	24	1.7/8-12		50	52
0850-32-32	2	50,8	32	2.1/2-12		65	62

0900 Femmina JIC svas. 74° Dado Spinato


(DKJ) JIC Female 74° cone Thrust Wire

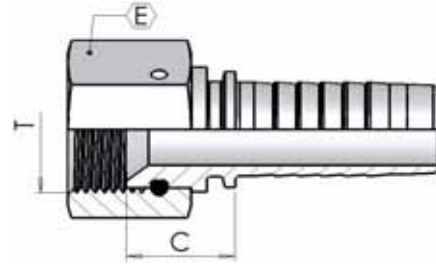

part number	hose I.D.		Dimension				
			dash size	thread		hex	cut-off
	in	mm		T		E	C
0900-03-04	3/16	4,8	03	7/16-20		17	14
0900-04-04	1/4	6,4	04	7/16-20		17	14
0900-04-05	1/4	6,4	04	1/2-20		17	15
0900-04-06	1/4	6,4	04	9/16-18		19	16
0900-05-05	5/16	7,9	05	1/2-20		17	15
0900-05-06	5/16	7,9	05	9/16-18		19	16
0900-06-05	3/8	9,5	06	1/2-20		17	15
0900-06-06	3/8	9,5	06	9/16-18		19	16
0900-06-07	3/8	9,5	06	5/8-18	*SAE 45°	22	17
0900-06-08	3/8	9,5	06	3/4-16		24	17
0900-06-10	3/8	9,5	06	7/8-14		27	21
0900-08-08	1/2	12,7	08	3/4-16		24	18
0900-08-10	1/2	12,7	08	7/8-14		27	19
0900-08-12	1/2	12,7	08	1.1/16-12		32	24
0900-10-10	5/8	15,9	10	7/8-14		27	19
0900-10-12	5/8	15,9	10	1.1/16-12		32	21
0900-12-10	3/4	19	12	7/8-14		27	20
0900-12-12	3/4	19	12	1.1/16-12		32	22
0900-12-14	3/4	19	12	1.3/16-12		36	23
0900-12-16	3/4	19	12	1.5/16-12		41	23
0900-16-12	1	25,4	16	1.1/16-12		32	22
0900-16-14	1	25,4	16	1.3/16-12		36	24
0900-16-16	1	25,4	16	1.5/16-12		41	24
0900-16-20	1	25,4	16	1.5/8-12		50	27
0900-20-20	1.1/4	31,8	20	1.5/8-12		50	28
0900-20-24	1.1/4	31,8	20	1.7/8-12		55	31
0900-24-24	1.1/2	38,1	24	1.7/8-12		55	31
0900-32-32	2	50,8	32	2.1/2-12		70	31

0901 Femmina JIC svas. 74°


(DKJ) JIC Female 74° cone

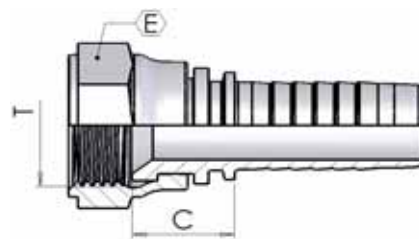

part number	hose I.D.		Dimension				
			dash size	thread		hex	cut-off
	in	mm		T		E	C
0901-03-04	3/16	4,8	03	7/16-20		15	14
0901-03-05	3/16	4,8	03	1/2-20		17	14
0901-04-04	1/4	6,4	04	7/16-20		15	14
0901-04-05	1/4	6,4	04	1/2-20		17	15
0901-04-06	1/4	6,4	04	9/16-18		19	16
0901-04-07	1/4	6,4	04	5/8-18	*SAE 45°	22	17
0901-05-05	5/16	7,9	05	1/2-20		17	15
0901-05-06	5/16	7,9	05	9/16-18		19	16
0901-05-07	5/16	7,9	05	5/8-18	*SAE 45°	22	17
0901-05-08	5/16	7,9	05	3/4-16		24	17
0901-06-04	3/8	9,5	06	7/16-20		15	15
0901-06-05	3/8	9,5	06	1/2-20		17	15
0901-06-06	3/8	9,5	06	9/16-18		19	16
0901-06-07	3/8	9,5	06	5/8-18	*SAE 45°	22	15
0901-06-08	3/8	9,5	06	3/4-16		24	17
0901-06-10	3/8	9,5	06	7/8-14		27	21
0901-08-08	1/2	12,7	08	3/4-16		24	18
0901-08-10	1/2	12,7	08	7/8-14		27	19
0901-08-12	1/2	12,7	08	1.1/16-12		32	24
0901-10-10	5/8	15,9	10	7/8-14		27	19
0901-10-12	5/8	15,9	10	1.1/16-12		32	21
0901-12-10	3/4	19	12	7/8-14		27	20
0901-12-12	3/4	19	12	1.1/16-12		32	22
0901-12-14	3/4	19	12	1.3/16-12		36	21
0901-12-16	3/4	19	12	1.5/16-12		38	23
0901-16-12	1	25,4	16	1.1/16-12		32	23
0901-16-16	1	25,4	16	1.5/16-12		38	24

0950 Curva JIC 90° svas. 74° Dado Spinato

(DKJ 90°) JIC 90° Swept Elbow 74° cone Thrust Wire

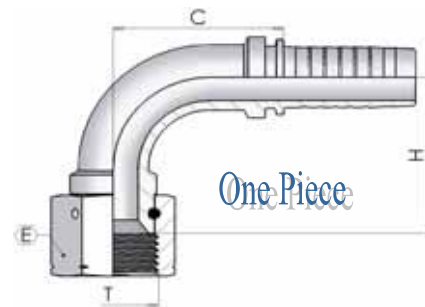


part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0950-03-04	3/16	4,8	03	7/16-20	17	22	22
0950-04-04	1/4	6,4	04	7/16-20	17	24	25
0950-04-05	1/4	6,4	04	1/2-20	17	25	25
0950-04-06	1/4	6,4	04	9/16-18	19	27	25
0950-05-06	5/16	7,9	05	9/16-18	19	31	29
0950-05-08	5/16	7,9	05	3/4-16	24	41	29
0950-06-05	3/8	9,5	06	1/2-20	17	30	33
0950-06-06	3/8	9,5	06	9/16-18	19	32	31
* SAE 45° 0950-06-07	3/8	9,5	06	5/8-18	22	32	33
0950-06-08	3/8	9,5	06	3/4-16	24	34	33
0950-06-10	3/8	9,5	06	7/8-14	27	36	33
0950-08-08	1/2	12,7	08	3/4-16	24	41	41
0950-08-10	1/2	12,7	08	7/8-14	27	40	41
0950-08-12	1/2	12,7	08	1.1/16-12	32	43	39
0950-10-10	5/8	15,9	10	7/8-14	27	44	43
0950-10-12	5/8	15,9	10	1.1/16-12	32	47	45
0950-12-10	3/4	19	12	7/8-14	27	53	56
0950-12-12	3/4	19	12	1.1/16-12	32	54	56
0950-12-14	3/4	19	12	1.3/16-12	36	54	57
0950-12-16	3/4	19	12	1.5/16-12	41	56	55
0950-16-12	1	25,4	16	1.1/16-12	32	64	70
0950-16-16	1	25,4	16	1.5/16-12	41	65	70
0950-16-20	1	25,4	16	1.5/8-12	50	74	70
0950-20-20	1.1/4	31,8	20	1.5/8-12	50	83	87
0950-24-24	1.1/2	38,1	24	1.7/8-12	55	97	102
0950-32-32	2	50,8	32	2.1/2-12	70	134	121

0950S Curva JIC 90° svas. 74° Dado Spinato (saldata)

(DKJ 90°)


JIC 90° Swept Elbow 74° cone Thrust Wire (welded)

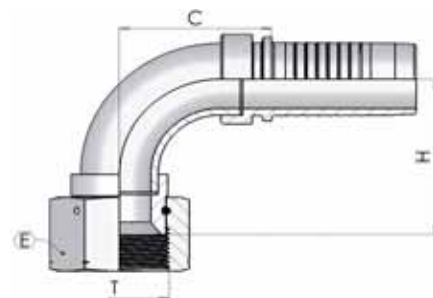

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0950S12-20	3/4	19	12	1.5/8-12	50	63	57
0950S16-14	1	25,4	16	1.3/16-12	36	69	62
0950S16-20	1	25,4	16	1.5/8-12	50	69	62
0950S20-20	1.1/4	31,8	20	1.5/8-12	50	69	63
0950S20-24	1.1/4	31,8	20	1.7/8-12	55	88	81
0950S24-24	1.1/2	38,1	24	1.7/8-12	55	88	81
0950S32-32	2	50,8	32	2.1/2-12	70	113	103

0951 Curva JIC 90° svas. 74°


(DKJ 90°) JIC 90° Swept Elbow 74° cone

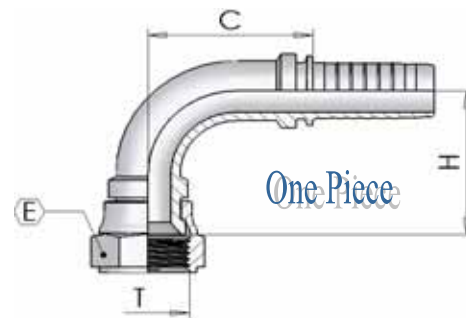

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
0951-03-04	3/16	4,8	03	7/16-20	15	22	22
0951-03-05	3/16	4,8	03	1/2-20	17	23	25
0951-04-04	1/4	6,4	04	7/16-20	15	24	25
0951-04-05	1/4	6,4	04	1/2-20	17	25	25
0951-04-06	1/4	6,4	04	9/16-18	19	27	25
0951-05-05	5/16	7,9	05	1/2-20	17	30	29
0951-05-06	5/16	7,9	05	9/16-18	19	31	29
0951-06-05	3/8	9,5	06	1/2-20	17	30	33
0951-06-06	3/8	9,5	06	9/16-18	19	32	31
* SAE 45° 0951-06-07	3/8	9,5	06	5/8-18	22	32	33
0951-06-08	3/8	9,5	06	3/4-16	24	34	33
0951-06-10	3/8	9,5	06	7/8-14	27	36	33
0951-08-08	1/2	12,7	08	3/4-16	24	41	41
0951-08-10	1/2	12,7	08	7/8-14	27	40	41
0951-08-12	1/2	12,7	08	1.1/16-12	32	43	39
0951-10-10	5/8	15,9	10	7/8-14	27	44	43
0951-10-12	5/8	15,9	10	1.1/16-12	32	47	45
0951-12-10	3/4	19	12	7/8-14	27	53	56
0951-12-12	3/4	19	12	1.1/16-12	32	54	56
0951-12-14	3/4	19	12	1.3/16-12	36	53	56
0951-12-16	3/4	19	12	1.5/16-12	38	56	55
0951-16-12	1	25,4	16	1.1/16-12	32	62	70
0951-16-16	1	25,4	16	1.5/16-12	38	65	70

1000 Curva JIC 45° svas. 74° Dado Spinato

(DKJ 45°) JIC 45° Swept Elbow 74° cone Thrust Wire

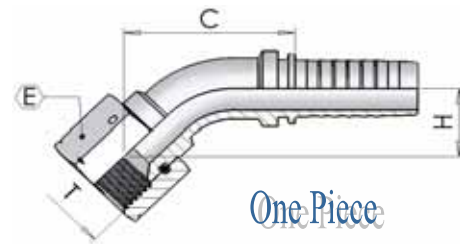


part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
1000-03-04	3/16	4,8	03	7/16-20	17	15	33
1000-04-04	1/4	6,4	04	7/16-20	17	13	38
1000-04-05	1/4	6,4	04	1/2-20	17	14	40
1000-04-06	1/4	6,4	04	9/16-18	19	16	42
1000-05-06	5/16	7,9	05	9/16-18	19	18	47
1000-06-05	3/8	9,5	06	1/2-20	17	17	51
1000-06-06	3/8	9,5	06	9/16-18	19	17	51
* SAE 45° 1000-06-07	3/8	9,5	06	5/8-18	22	17	51
1000-06-08	3/8	9,5	06	3/4-16	24	19	52
1000-06-10	3/8	9,5	06	7/8-14	27	21	54
1000-08-08	1/2	12,7	08	3/4-16	24	22	62
1000-08-10	1/2	12,7	08	7/8-14	27	23	64
1000-08-12	1/2	12,7	08	1.1/16-12	32	25	68
1000-10-10	5/8	15,9	10	7/8-14	27	24	68
1000-10-12	5/8	15,9	10	1.1/16-12	32	25	70
1000-12-10	3/4	19	12	7/8-14	27	27	83
1000-12-12	3/4	19	12	1.1/16-12	32	28	84
1000-12-14	3/4	19	12	1.3/16-12	36	29	85
1000-12-16	3/4	19	12	1.5/16-12	41	30	88
1000-16-12	1	25,4	16	1.1/16-12	32	32	103
1000-16-16	1	25,4	16	1.5/16-12	41	33	104
1000-20-20	1.1/4	31,8	20	1.5/8-12	50	40	108
1000-24-24	1.1/2	38,1	24	1.7/8-12	55	49	119
1000-32-32	2	50,8	32	2.1/2-12	70	65	142

1000S Curva JIC 45° svas. 74° Dado Spinato (saldata)

(DKJ 45°)


JIC 45° Swept Elbow 74° cone Thrust Wire (welded)

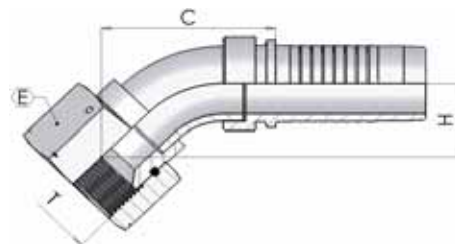

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
1000S12-20	3/4	19	12	1.5/8-12	50	31	68
1000S16-14	1	25,4	16	1.3/16-12	36	33	72
1000S16-20	1	25,4	16	1.5/8-12	50	31	68
1000S20-20	1.1/4	31,8	20	1.5/8-12	50	45	83
1000S20-24	1.1/4	31,8	20	1.7/8-12	55	39	89
1000S24-24	1.1/2	38,1	24	1.7/8-12	55	55	105
1000S32-32	2	50,8	32	2.1/2-12	70	70	132

1001 Curva JIC 45° svas. 74°


(DKJ 45°) JIC 45° Swept Elbow 74° Cone

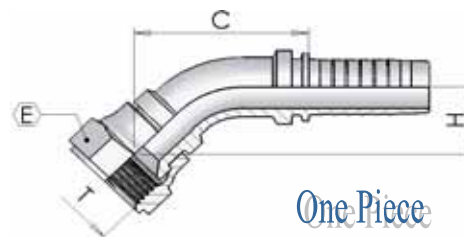

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
1001-03-04	3/16	4,8	03	7/16-20	15	15	33
1001-04-04	1/4	6,4	04	7/16-20	15	13	38
1001-04-05	1/4	6,4	04	1/2-20	17	14	40
1001-04-06	1/4	6,4	04	9/16-18	19	16	42
1001-05-05	5/16	7,9	05	1/2-20	17	17	46
1001-05-06	5/16	7,9	05	9/16-18	19	18	47
1001-06-06	3/8	9,5	06	9/16-18	19	17	51
* SAE 45° 1001-06-07	3/8	9,5	06	5/8-18	22	17	51
1001-06-08	3/8	9,5	06	3/4-16	24	19	52
1001-08-08	1/2	12,7	08	3/4-16	24	22	62
1001-08-10	1/2	12,7	08	7/8-14	27	23	64
1001-08-12	1/2	12,7	08	1.1/16-12	32	25	68
1001-10-10	5/8	15,9	10	7/8-14	27	23	68
1001-10-12	5/8	15,9	10	1.1/16-12	32	25	70
1001-12-12	3/4	19	12	1.1/16-12	32	28	84
1001-12-14	3/4	19	12	1.3/16-12	36	28	83
1001-12-16	3/4	19	12	1.5/16-12	38	30	88
1001-16-16	1	25,4	16	1.5/16-12	38	33	104

0901D Femmina JIC Svas.74° Doppio Esagono

(DKJ) JIC Female 74° Cone Back Hexagon

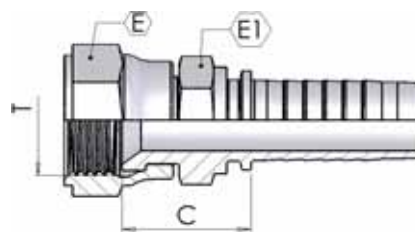


part number	hose I.D.		Dimension				
			dash size	thread T	hex E	hex E1	cut-off C
0901D04-04	1/4	6,4	04	7/16-20	17	12	20
0901D04-05	1/4	6,4	04	1/2-20	17	14	20
0901D04-06	1/4	6,4	04	9/16-18	19	14	22
0901D05-05	5/16	7,9	05	1/2-20	17	14	20
0901D05-06	5/16	7,9	05	9/16-18	19	15	22
0901D06-06	3/8	9,5	06	9/16-18	19	17	24
0901D06-08	3/8	9,5	06	3/4-16	24	19	26
0901D08-08	1/2	12,7	08	3/4-16	24	22	26
0901D08-10	1/2	12,7	08	7/8-14	27	22	27
0901D10-10	5/8	15,9	10	7/8-14	27	22	26
0901D10-12	5/8	15,9	10	1.1/16-12	32	27	27
0901D12-12	3/4	19	12	1.1/16-12	32	27	32
0901D16-16	1	25,4	16	1.5/16-12	38	35	38

2971 **Compatta JIC 90° svas. 74° Dado Crimpato (forgiata)**

(DKJ 90°K)

JIC 90° Compact Elbow 74° Cone Rolled Nut (forged)

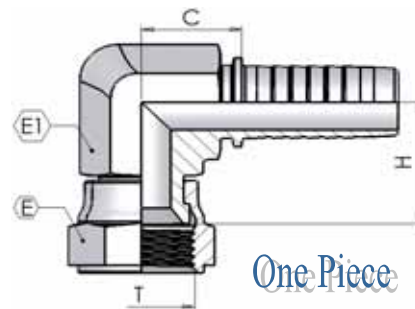


part number	hose I.D.		Dimension					
			dash size	thread T	hex E	hex E1	drop H	cut-off C
2971-04-04	1/4	6,4	04	7/16-20	15	15	17	19
2971-04-05	1/4	6,4	04	1/2-20	17	15	18	19
2971-04-06	1/4	6,4	04	9/16-18	19	15	19	19
2971-05-06	5/16	7,9	05	9/16-18	19	17	20	20
2971-06-06	3/8	9,5	06	9/16-18	19	17	20	23
2971-06-08	3/8	9,5	06	3/4-16	24	22	22	24
2971-08-08	1/2	12,7	08	3/4-16	24	22	23	26
2971-08-10	1/2	12,7	08	7/8-14	27	22	24	26
2971-12-12	3/4	19	12	1.1/16-12	32	27	29	32
2971-16-16	1	25,4	16	1.5/16-12	38	32	34	38

2970 **Compatta JIC 90° svas. 74° Dado Spinato (forgiata)**

(DKJ 90°K)

JIC 90° Compact Elbow 74° Cone Thrust Wire (forged)

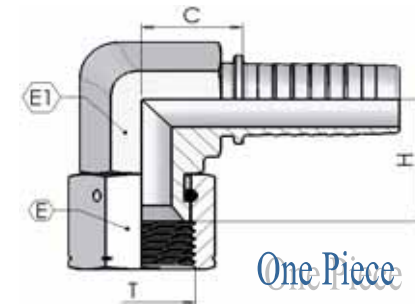


part number	hose I.D.		Dimension					
			dash size	thread T	hex E	hex E1	drop H	cut-off C
2970-04-04	1/4	6,4	04	7/16-20	17	15	17	19
2970-04-05	1/4	6,4	04	1/2-20	17	15	18	19
2970-04-06	1/4	6,4	04	9/16-18	19	15	19	19
2970-05-06	5/16	7,9	05	9/16-18	19	17	20	20
2970-06-06	3/8	9,5	06	9/16-18	19	17	20	23
* SAE 45° 2970-06-07	3/8	9,5	06	5/8-18	22	17	21	23
2970-06-08	3/8	9,5	06	3/4-16	24	22	22	24
2970-08-08	1/2	12,7	08	3/4-16	24	22	23	26
2970-08-10	1/2	12,7	08	7/8-14	27	22	24	26
2970-12-12	3/4	19	12	1.1/16-12	32	27	29	32
2970-16-16	1	25,4	16	1.5/16-12	41	32	34	38

2950 **Compatta JIC 90° svas. 74° Dado Spinato (saldato)**

(DKJ 90°K)

JIC 90° Compact Elbow 74° Cone Thrust Wire (welded)

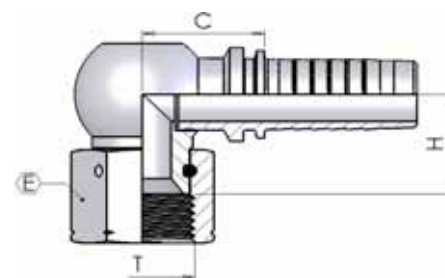


part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
2950-10-10	5/8	15,9	10	7/8-14	27	26	28
2950-10-12	5/8	15,9	10	1.1/16-12	32	28	29

0902 Femmina JIC svas. 74° Dado Libero

(DKJ)

JIC Female 74° Cone Slip On Nut

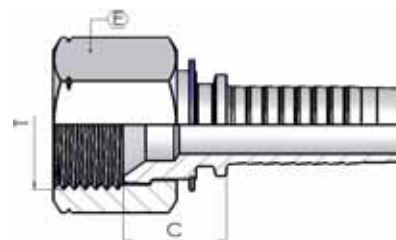


part number	hose I.D.		Dimension			
			dash size	thread T	hex E	cut-off C
0902-04-05	1/4	6,4	04	1/2-20	17	17
0902-04-06	1/4	6,4	04	9/16-18	19	17
0902-05-06	5/16	7,9	05	9/16-18	19	16
0902-06-08	3/8	9,5	08	3/4-16	22	18
0902-08-10	1/2	12,7	08	7/8-14	27	20
0902-10-12	5/8	15,9	10	1.1/16-12	32	20
0902-12-16	3/4	19	12	1.5/16-12	38	21

0952 Curva JIC 90° svas. 74° Dado Libero

(DKJ 90°)

JIC 90° Swept Elbow 74° Cone Slip On Nut

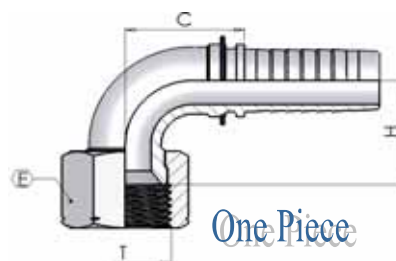


part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0952-04-05	1/4	6,4	04	1/2-20	17	21	27
0952-04-06	1/4	6,4	04	9/16-18	19	21	26
0952-05-06	5/16	7,9	05	9/16-18	19	32	25
0952-06-08	3/8	9,5	08	3/4-16	22	26	35
0952-08-10	1/2	12,7	08	7/8-14	27	32	40
0952-10-12	5/8	15,9	10	1.1/16-12	32	37	47
0952-12-12	3/4	19	12	1.1/16-12	32	45	58
0952-12-16	3/4	19	12	1.5/16-12	38	57	56

1002 Curva JIC 45° svas. 74° Dado Libero

(DKJ 45°)


JIC 45° Swept Elbow 74° Cone Slip On Nut

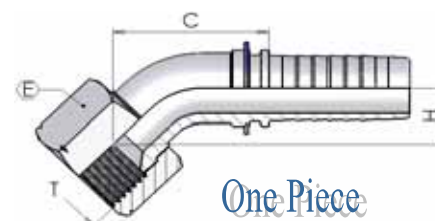

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
1002-04-05	1/4	6,4	04	1/2-20	17	11	38
1002-04-06	1/4	6,4	04	9/16-18	19	11	38
1002-05-06	5/16	7,9	05	9/16-18	19	20	49
1002-06-08	3/8	9,5	08	3/4-16	22	13	48
1002-08-10	1/2	12,7	08	7/8-14	27	16	58
1002-10-12	5/8	15,9	10	1.1/16-12	32	18	66
1002-12-12	3/4	19	12	1.1/16-12	32	21	81
1002-12-16	3/4	19	12	1.5/16-12	38	30	86

0385 Maschio SAE O'R Sede Piana


(SAE-OR) SAE Male O'R Flat Seat

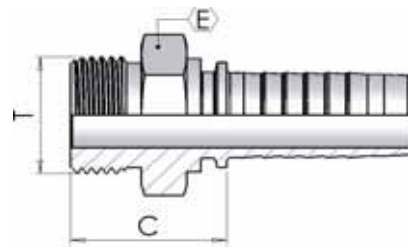

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0385-04-04	1/4	6,4	04	7/16-20	14	24
0385-04-05	1/4	6,4	04	1/2-20	17	24
0385-04-06	1/4	6,4	04	9/16-18	17	24
0385-05-06	5/16	7,9	05	9/16-18	17	24
0385-06-06	3/8	9,5	06	9/16-18	17	25
0385-06-08	3/8	9,5	06	3/4-16	22	28
0385-08-08	1/2	12,7	08	3/4-16	22	28
0385-08-10	1/2	12,7	08	7/8-14	27	30
0385-08-12	1/2	12,7	08	1.1/16-12	32	32
0385-10-10	5/8	15,9	10	7/8-14	27	30
0385-10-12	5/8	15,9	10	1.1/16-12	32	32
0385-12-10	3/4	19	12	7/8-14	27	31
0385-12-12	3/4	19	12	1.1/16-12	32	33
0385-12-16	3/4	19	12	1.5/16-12	38	36
0385-16-16	1	25,4	16	1.5/16-12	38	37

0390 Maschio Girevole O'Ring


(BOSS) Swivel Male O'Ring

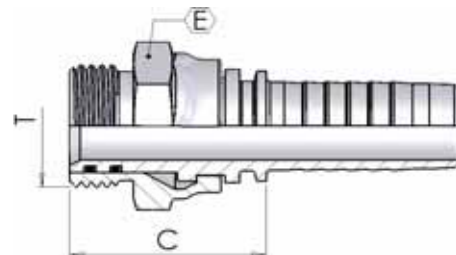

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0390-08-10	1/2	12,7	08	7/8-14	27	39
0390-10-10	5/8	15,9	10	7/8-14	27	39
0390-12-12	3/4	19	12	1.1/16-12	32	43

0395 Maschio Girevole 90° O'Ring


(BOSS 90°) 90° SWIVEL MALE O'RING

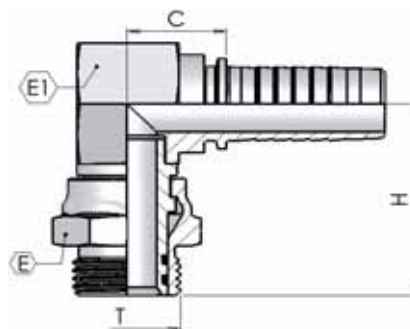

part number	hose I.D.		Dimension					
			dash size	thread	hex	hex	drop	cut-off
	in	mm		T	E	E1	H	C
0395-08-10	1/2	12,7	08	7/8-14	27	27	42	28
0395-10-10	5/8	15,9	10	7/8-14	27	27	42	29
0395-12-12	3/4	19	12	1.1/16-12	32	32	48	30

IF00 Maschio SAE Girevole Cono Inverso


(SIF) Straight Male Inverted Flare Swivel

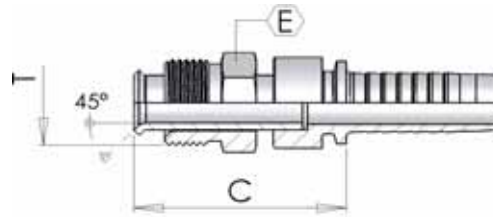

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
IF00-04-04	1/4	6,4	04	7/16-24	12	38
IF00-04-05	1/4	6,4	04	1/2-20	14	55
IF00-05-04	5/8	7,9	05	7/16-24	12	56
IF00-05-05	5/8	7,9	05	1/2-20	14	56
IF00-05-07	5/8	7,9	05	5/8-18	17	56
IF00-06-04	3/8	9,5	06	7/16-24	12	56
IF00-06-05	3/8	9,5	06	1/2-20	14	56
IF00-06-07	3/8	9,5	06	5/8-18	17	57
IF00-06-09	3/8	9,5	06	11/16-18	19	42
IF00-08-08	1/2	12,7	08	3/4-18	19	60

IF90 Maschio SAE Girevole Cono Inverso a 90°


(SIF 90°) 90° Male Inverted Flare Swivel

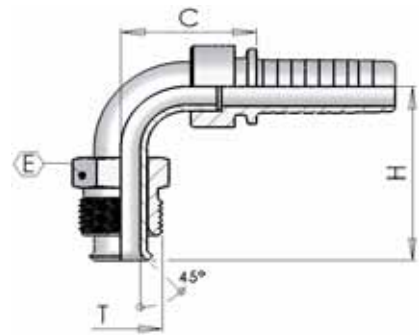

part number	hose I.D.		Dimension				
	in	mm	dash size	thread T	hex E	drop H	cut-off C
IF90-04-04	1/4	6,4	04	7/16-24	12	36	29
IF90-04-05	1/4	6,4	04	1/2-20	14	34	30
IF90-05-04	5/8	7,9	05	7/16-24	12	38	24
IF90-05-05	5/8	7,9	05	1/2-20	14	35	30
IF90-05-07	5/8	7,9	05	5/8-18	17	43	30
IF90-06-04	3/8	9,5	06	7/16-24	12	35	30
IF90-06-05	3/8	9,5	06	1/2-20	14	35	30
IF90-06-07	3/8	9,5	06	5/8-18	17	44	31
IF90-06-09	3/8	9,5	06	11/16-18	19	42	31
IF90-08-08	1/2	12,7	08	3/4-18	19	45	35

IF45 Maschio SAE Girevole Cono Inverso a 45°


(SIF 45°) 45° Male Inverted Flare Swivel

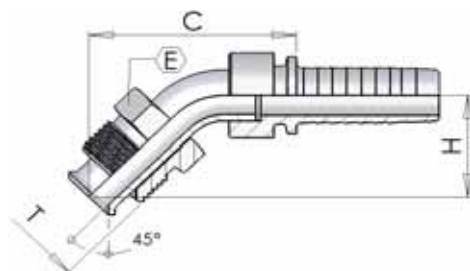

part number	hose I.D.		Dimension				
	in	mm	dash size	thread T	hex E	drop H	cut-off C
IF45-06-04	3/8	9,5	06	7/16-24	12	25	48
IF45-06-05	3/8	9,5	06	1/2-20	14	25	48
IF45-06-07	3/8	9,5	06	5/8-18	17	30	54
IF45-06-09	3/8	9,5	06	11/16-18	19	30	54

0400 Maschio Metrico Svas.60°


(AGM) Metric Male 60° cone

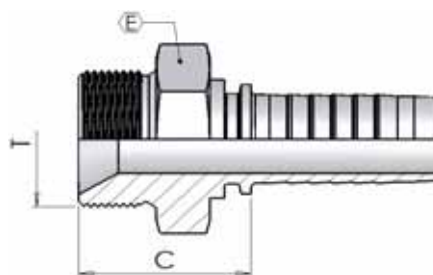

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0400-03-10	3/16	4,8	03	M10-1	14	19
0400-03-12	3/16	4,8	03	M12-1.5	17	25
0400-04-10	1/4	6,4	04	M10-1	14	20
0400-04-12	1/4	6,4	04	M12-1.5	17	26
0400-04-14	1/4	6,4	04	M14-1.5	19	26
0400-04-16	1/4	6,4	04	M16-1.5	22	26
0400-05-12	5/16	7,9	05	M12-1.5	17	26
0400-05-16	5/16	7,9	05	M16-1.5	22	26
0400-05-18	5/16	7,9	05	M18-1.5	24	26
0400-06-14	3/8	9,5	06	M14-1.5	19	26
0400-06-16	3/8	9,5	06	M16-1.5	22	26
0400-06-18	3/8	9,5	06	M18-1.5	24	27
0400-06-22	3/8	9,5	06	M22-1.5	27	27
0400-08-18	1/2	12,7	08	M18-1.5	24	28
0400-08-22	1/2	12,7	08	M22-1.5	27	30
0400-10-26	5/8	15,9	10	M26-1.5	32	32
0400-12-26	3/4	19	12	M26-1.5	32	33
0400-12-30	3/4	19	12	M30-1.5	36	36
0400-16-38	1	25,4	16	M38-1.5	46	37
0400-20-45	1.1/4	31,8	20	M45-1.5	55	39

0100 Femmina Metrica Cono 60°


(DKM) Metric Female 60° cone

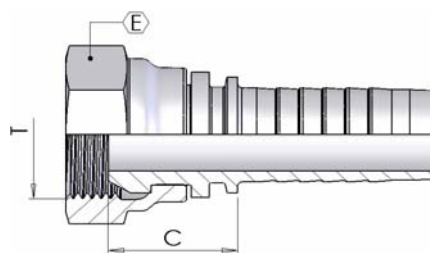

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0100-12-30	3/4	19	12	M30-1.5	36	23
0100-16-38	1	25,4	16	M38-1.5	46	33
0100-20-45	1.1/4	31,8	20	M45-1.5	50	34
0100-24-52	1.1/2	38	24	M52x1,5	60	35
0100-32-65	2	50,8	32	M65-2	75	31

0200 Curva Metrica 90° cono 60°


(DKM 90°) 90° Metric Swept Elbow 60° cone

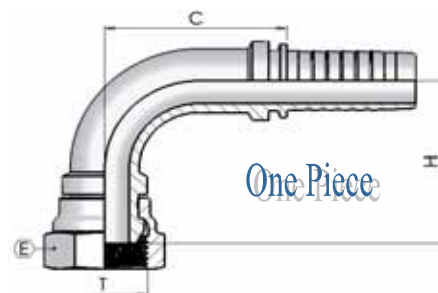

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0200-16-38	1	25,4	16	M38-1.5	46	71	70

0200S Curva Metrica 90° cono 60° (saldata)


(DKM 90°) 90° Metric Swept Elbow 60° cone (welded)

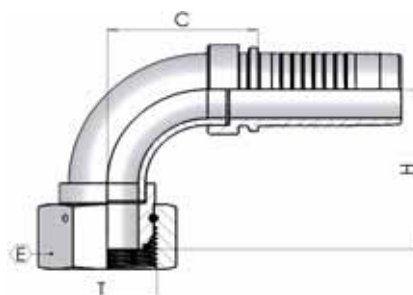

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0200S12-30	3/4	19	12	M30-1.5	36	57	48
0200S20-45	1.1/4	31,8	20	M45-1.5	50	71	63

0300 Curva Metrica 45° cono 60°


(DKM 45°) 45° Metric Swept Elbow 60° cone

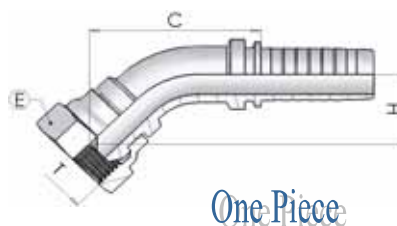

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0300-16-38	1	25,4	16	M38-1.5	46	38	109

0300S Curva Metrica 45° cono 60° (saldata)


(DKM 45°) 45° Metric Swept Elbow 60° cone (welded)

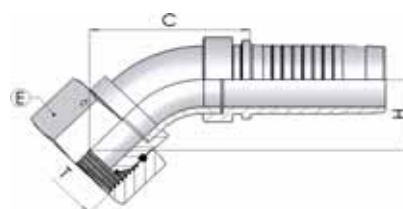

part number	hose I.D.		Dimension				
			dash size	thread T	hex E	drop H	cut-off C
0300S12-30	3/4	19	12	M30-1.5	36	27	57
0300S20-45	1.1/4	31,8	20	M45-1.5	50	27	73

0500 Maschio Metrico svas. 24° Serie Leggera


(CEL) Metric Male 24° Seat Light

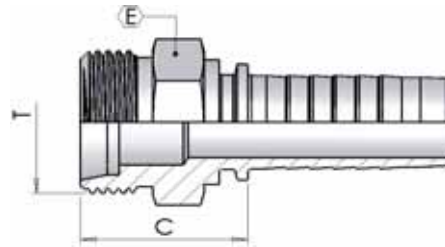

part number	hose I.D.		Dimension				
			dash size	thread	erm.	hex	cut-off
	in	mm		T		E	C
0500-03-12	3/16	4,8	03	M12-1.5	6	14	22
0500-04-12	1/4	6,4	04	M12-1.5	6	14	23
0500-04-14	1/4	6,4	04	M14-1.5	8	14	22
0500-04-16	1/4	6,4	04	M16-1.5	10	17	23
0500-04-18	1/4	6,4	04	M18-1.5	12	19	24
0500-05-14	5/16	7,9	05	M14-1.5	8	14	22
0500-05-16	5/16	7,9	05	M16-1.5	10	17	23
0500-05-18	5/16	7,9	05	M18-1.5	12	19	24
0500-05-22	5/16	7,9	05	M22-1.5	15	22	25
0500-06-16	3/8	9,5	06	M16-1.5	10	17	23
0500-06-18	3/8	9,5	06	M18-1.5	12	19	24
0500-06-22	3/8	9,5	06	M22-1.5	15	22	25
0500-08-18	1/2	12,7	08	M18-1.5	12	19	25
0500-08-22	1/2	12,7	08	M22-1.5	15	22	26
0500-08-26	1/2	12,7	08	M26-1.5	18	27	27
0500-10-22	5/8	15,9	10	M22-1.5	15	22	26
0500-10-26	5/8	15,9	10	M26-1.5	18	27	27
0500-10-30	5/8	15,9	10	M30-2	22	30	32
0500-12-26	3/4	19	12	M26-1.5	18	27	28
0500-12-30	3/4	19	12	M30-2	22	30	33
0500-16-36	1	25,4	16	M36-2	28	36	32
0500-20-45	1.1/4	31,8	20	M45-2	35	46	36
0500-24-52	1.1/2	38,1	24	M52-2	42	55	38

0450 Maschio Metrico svas. 24° Serie Pesante


(CES) Metric Male 24° Seat Heavy

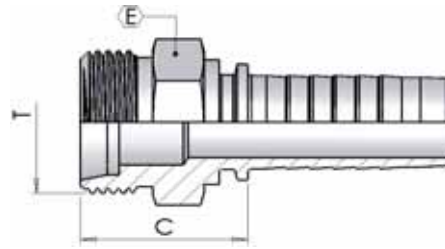

part number	hose I.D.		Dimension				
			dash size	thread	erm.	hex	cut-off
	in	mm		T		E	C
0450-03-16	3/16	4,8	03	M16-1.5	8	17	26
0450-04-14	1/4	6,4	04	M14-1.5	6	14	25
0450-04-16	1/4	6,4	04	M16-1.5	8	17	27
0450-04-18	1/4	6,4	04	M18-1.5	10	19	27
0450-05-18	5/16	7,9	05	M18-1.5	10	19	27
0450-05-20	5/16	7,9	05	M20-1.5	12	22	29
0450-06-18	3/8	9,5	06	M18-1.5	10	19	27
0450-06-20	3/8	9,5	06	M20-1.5	12	22	29
0450-06-22	3/8	9,5	06	M22-1.5	14	22	31
0450-06-24	3/8	9,5	06	M24-1.5	16	24	31
0450-08-24	1/2	12,7	08	M24-1.5	16	24	32
0450-10-30	5/8	15,9	10	M30-2	20	30	34
0450-12-30	3/4	19	12	M30-2	20	30	35
0450-12-36	3/4	19	12	M36-2	25	36	38
0450-16-36	1	25,4	16	M36-2	25	36	39
0450-16-42	1	25,4	16	M42-2	30	46	42
0450-20-42	1.1/4	31,8	20	M42-2	30	46	43
0450-20-52	1.1/4	31,8	20	M52-2	38	55	45
0450-24-52	1.1/2	38,1	24	M52-2	38	55	45

0085 Femmina Metrica cono 24° Serie Leggera


(DKOL) Metric Female 24° Seat Light

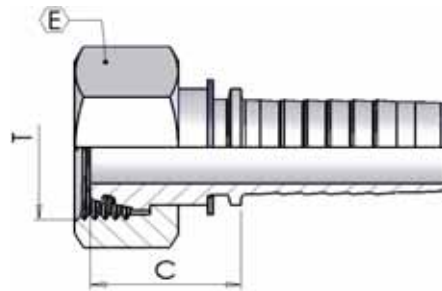

part number	hose I.D.		Dimension				
			dash size	thread	erm.	hex	cut-off
	in	mm		T		E	C
0085-03-12	3/16	4,8	03	M12-1.5	6	14	23
0085-04-14	1/4	6,4	04	M14-1.5	8	17	24
0085-04-16	1/4	6,4	04	M16-1.5	10	19	24
0085-04-18	1/4	6,4	04	M18-1.5	12	22	25
0085-05-16	5/16	7,9	05	M16-1.5	10	19	24
0085-05-18	5/16	7,9	05	M18-1.5	12	22	25
0085-06-18	3/8	9,5	06	M18-1.5	12	22	25
0085-06-22	3/8	9,5	06	M22-1.5	15	27	29
0085-08-22	1/2	12,7	08	M22-1.5	15	27	29
0085-08-26	1/2	12,7	08	M26-1.5	18	32	29
0085-10-26	5/8	15,9	10	M26-1.5	18	32	29
0085-10-30	5/8	15,9	12	M30-2	22	36	29
0085-12-30	3/4	19	12	M30-2	22	36	29
0085-12-36	3/4	19	12	M36-2	28	41	28
0085-16-36	1	25,4	16	M36-2	28	41	30
0085-20-45	1.1/4	31,8	20	M45-2	35	50	40
0085-24-52	1.1/2	38,1	24	M52-2	42	60	41

0085 Femmina Metrica cono 24° Serie Leggera (dado rullato)


(DKOL) Metric Female 24° Seat Light (rolled nut)

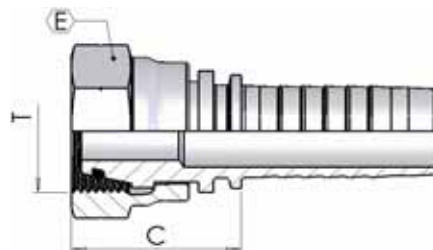

part number	hose I.D.		Dimension				
			dash size	thread	erm.	hex	cut-off
	in	mm		T		E	C
0085-04-12	1/4	6,4	04	M12-1.5	6	14	25
0085-05-14	5/16	7,9	05	M14-1.5	8	19	26
0085-06-16	3/8	9,5	06	M16-1.5	10	19	25
0085-08-18	1/2	12,7	08	M18-1.5	12	24	28
0085-10-22	5/8	15,9	10	M22-1.5	15	27	32
0085-12-26	3/4	19	12	M26-1.5	18	32	36

0084 Femmina Metrica cono 24° Serie Pesante


(DKOS) Metric Female 24° Seat Heavy

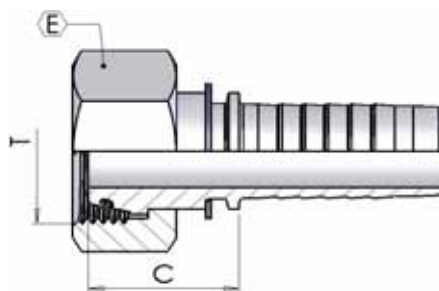

part number	hose I.D.		Dimension				
			dash size	thread	erm.	hex	cut-off
	in	mm		T		E	C
0084-03-16	3/16	4,8	03	M16-1.5	8	19	25
0084-04-14	1/4	6,4	04	M14-1.5	6	17	23
0084-04-16	1/4	6,4	04	M16-1.5	8	19	25
0084-04-18	1/4	6,4	04	M18-1.5	10	22	24
0084-05-18	5/16	7,9	05	M18-1.5	10	22	24
0084-05-20	5/16	7,9	05	M20-1.5	12	24	26
0084-06-16	3/8	9,5	06	M16-1.5	8	19	26
0084-06-18	3/8	9,5	06	M18-1.5	10	22	25
0084-06-20	3/8	9,5	06	M20-1.5	12	24	25
0084-06-22	3/8	9,5	06	M22-1.5	14	27	29
0084-08-22	1/2	12,7	08	M22-1.5	14	27	17
0084-08-24	1/2	12,7	08	M24-1.5	16	30	30
0084-08-30	1/2	12,7	08	M30-2	20	36	33
0084-10-24	5/8	15,9	10	M24-1.5	16	30	31
0084-10-30	5/8	15,9	10	M30-2	20	36	33
0084-12-30	3/4	19	12	M30-2	20	36	34
0084-12-36	3/4	19	12	M36-2	25	46	40
0084-16-36	1	25,4	16	M36-2	25	46	41
0084-16-42	1	25,4	16	M42-2	30	50	43
0084-20-52	1.1/4	31,8	20	M52-2	38	60	44
0084-24-52	1.1/2	38,1	24	M52-2	38	60	44

0185 Curva Metrica 90° cono 24° Serie Leggera


(DKOL 90°) 90° Metric Swept Elbow 24° Seat Light

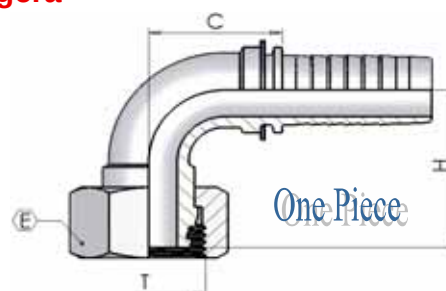

part number	hose I.D.		Dimension					
			dash size	thread	erm.	hex	drop	cut-off
	in	mm		T		E	H	C
0185-03-12	3/16	4,8	03	M12-1.5	6	14	23	22
0185-04-14	1/4	6,4	04	M14-1.5	8	17	26	26
0185-04-16	1/4	6,4	04	M16-1.5	10	19	27	25
0185-04-18	1/4	6,4	04	M18-1.5	12	22	30	27
0185-05-16	5/16	7,9	05	M16-1.5	10	19	31	31
0185-05-18	5/16	7,9	05	M18-1.5	12	22	32	31
0185-06-18	3/8	9,5	06	M18-1.5	12	22	35	32
0185-06-22	3/8	9,5	06	M22-1.5	15	27	35	32
0185-08-22	1/2	12,7	08	M22-1.5	15	27	38	41
0185-10-26	5/8	15,9	10	M26-1.5	18	32	44	44
0185-12-30	3/4	19	12	M30-2	22	36	51	49
0185-16-36	1	25,4	16	M36-2	28	41	62	72

0185S Curva Metrica 90° cono 24° Serie Leggera (saldata)


(DKOL 90°) 90° Metric Swept Elbow 24° Seat Light (welded)

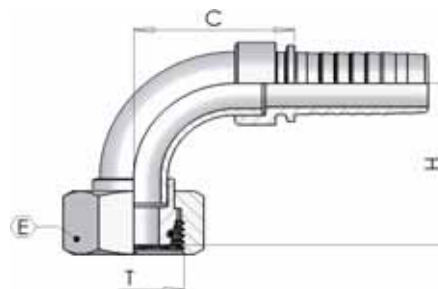

part number	hose I.D.		Dimension					
			dash size	thread	erm.	hex	drop	cut-off
	in	mm		T		E	H	C
0185S08-18	1/2	12,7	08	M18-1.5	12	22	48	33
0185S08-26	1/2	12,7	08	M26-1.5	18	32	44	42
0185S12-26	3/4	19	12	M26-1.5	18	32	44	42
0185S12-36	3/4	19	12	M36-2	28	41	51	49
0185S20-45	1.1/4	31,8	20	M45-2	35	50	73	63
0185S24-52	1.1/2	38,1	24	M52-2	42	60	83	81

0185 Curva Metrica 90° Cono 24° Serie Leggera (dato rullato)


(DKOL 90°) 90° Metric Swept Elbow 24° Seat Light (rolled nut)

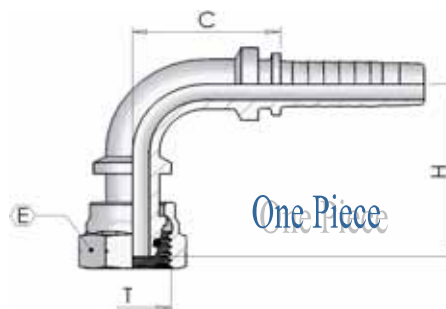

part number	hose I.D.		Dimension					
			dash	thread	erm.	hex	drop	cut-off
	in	mm	size	T		E	H	C
0185-04-12	1/4	6,4	04	M12-1.5	6	14	34	26
0185-05-14	5/16	7,9	05	M14-1.5	8	17	38	30
0185-06-16	3/8	9,5	06	M16-1.5	10	19	39	32

0184 Curva Metrica 90° cono 24° Serie Pesante

(DKOS 90°) 90° Metric Swept Elbow 24° Seat Heavy

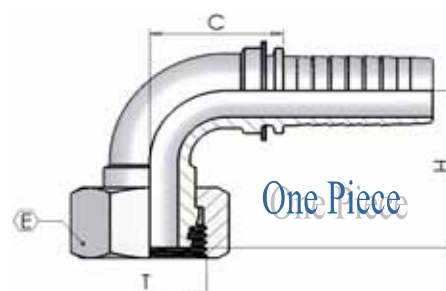


part number	hose I.D.		Dimension					
			dash	thread	erm.	hex	drop	cut-off
	in	mm	size	T		E	H	C
0184-03-16	3/16	4,8	03	M16-1.5	8	19	25	22
0184-04-14	1/4	6,4	04	M14-1.5	6	17	26	27
0184-04-16	1/4	6,4	04	M16-1.5	8	19	26	26
0184-04-18	1/4	6,4	04	M18-1.5	10	22	31	27
0184-04-20	1/4	6,4	04	M20-1.5	12	24	30	27
0184-05-18	5/16	7,9	05	M18-1.5	10	22	33	33
0184-05-20	5/16	7,9	05	M20-1.5	12	24	34	30
0184-06-18	3/8	9,5	06	M18-1.5	10	22	35	34
0184-06-20	3/8	9,5	06	M20-1.5	12	24	34	34
0184-06-22	3/8	9,5	06	M22-1.5	14	27	33	33
0184-08-24	1/2	12,7	08	M24-1.5	16	30	41	40
0184-10-24	5/8	15,9	10	M24-1.5	16	30	38	42
0184-10-30	5/8	15,9	10	M30-2	20	36	50	46
0184-12-30	3/4	19	12	M30-2	20	36	56	58
0184-12-36	3/4	19	12	M36-2	25	46	59	56
0184-16-36	1	25,4	16	M36-2	25	46	67	69
0184-16-42	1	25,4	16	M42-2	30	50	67	69
0184-20-52	1.1/4	31,8	20	M52-2	38	60	82	84
0184-24-52	1.1/2	38,1	24	M52-2	38	60	94	99

saldata

0285 Curva Metrica 45° cono 24° Serie Leggera


(DKOL 45°) 45° Metric Swept Elbow 24° Seat Light

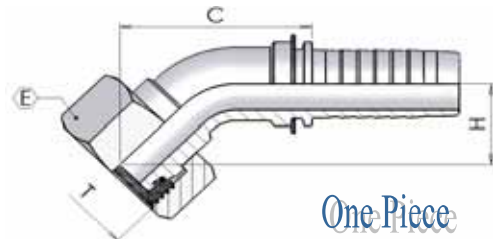

part number	hose I.D.		Dimension					
			dash size	thread	erm.	hex	drop	cut-off
	in	mm		T		E	H	C
0285-03-12	3/16	4,8	03	M12-1.5	6	14	14	36
0285-04-14	1/4	6,4	04	M14-1.5	8	17	14	42
0285-04-16	1/4	6,4	04	M16-1.5	10	19	15	42
0285-04-18	1/4	6,4	04	M18-1.5	12	22	16	43
0285-05-16	5/16	7,9	05	M16-1.5	10	19	17	48
0285-05-18	5/16	7,9	05	M18-1.5	12	22	18	48
0285-06-18	3/8	9,5	06	M18-1.5	12	22	19	52
0285-06-22	3/8	9,5	06	M22-1.5	15	27	19	51
0285-08-22	1/2	12,7	08	M22-1.5	15	27	21	63
0285-10-26	5/8	15,9	10	M26-1.5	18	32	23	68
0285-12-30	3/4	19	12	M30-2	22	36	27	85
0285-16-36	1	25,4	16	M36-2	28	41	32	102

0285S Curva Metrica 45° Cono 24° Serie Leggera (saldata)

(DKOL 45°) 45° Metric Swept Elbow 24° Seat Light (welded)

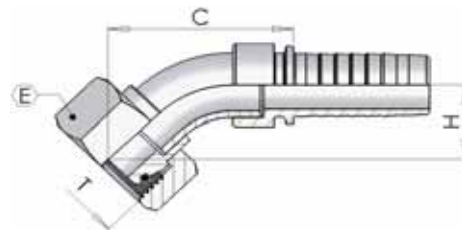


part number	hose I.D.		Dimension					
			dash size	thread	erm.	hex	drop	cut-off
	in	mm		T		E	H	C
0285S08-26	1/2	12,7	08	M26-1.5	18	32	17	44
0285S12-26	3/4	19	12	M26-1.5	18	32	19	43
0285S20-45	1.1/4	31,8	20	M45-2	35	50	34	72
0285S24-52	1.1/2	38,1	24	M52-2	42	60	36	85

Dado Rullato

0285 Curva Metrica 45° Cono 24° Serie Leggera (dato rullato)


(DKOL 45°) 45° Metric Swept Elbow 24° Seat Light (rolled nut)

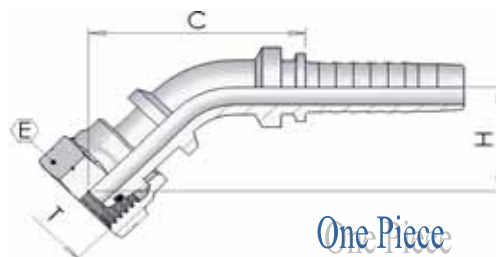

part number	hose I.D.		Dimension					
			dash	thread	erm.	hex	drop	cut-off
	in	mm	size	T		E	H	C
0285-04-12	1/4	6,4	04	M12-1.5	6	14	20	46
0285-06-16	3/8	9,5	06	M16-1.5	10	19	22	55

0284 Curva Metrica 45° cono 24° Serie Pesante


(DKOS 45°) 45° Metric Swept Elbow 24° Seat Heavy

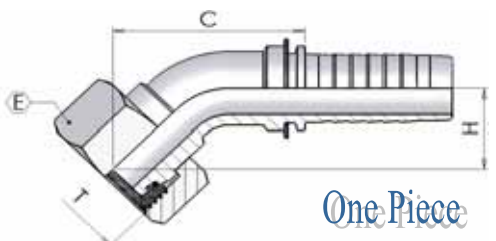

part number	hose I.D.		Dimension					
			dash	thread	erm.	hex	drop	cut-off
	in	mm	size	T		E	H	C
0284-03-16	3/16	4,8	03	M16-1.5	8	19	16	36
0284-04-14	1/4	6,4	04	M14-1.5	6	17	15	37
0284-04-16	1/4	6,4	04	M16-1.5	8	19	15	42
0284-04-18	1/4	6,4	04	M18-1.5	10	22	18	45
0284-05-20	5/16	7,9	05	M20-1.5	12	24	19	49
0284-06-18	3/8	9,5	06	M18-1.5	10	22	18	54
0284-06-20	3/8	9,5	06	M20-1.5	12	24	18	53
0284-06-22	3/8	9,5	06	M22-1.5	14	27	20	54
0284-08-24	1/2	12,7	08	M24-1.5	16	30	21	63
0284-10-30	5/8	15,9	10	M30-2	20	36	29	74
0284-12-30	3/4	19	12	M30-2	20	36	30	87
0284-12-36	3/4	19	12	M36-2	25	46	31	74
0284-16-36	1	25,4	16	M36-2	25	46	34	105
0284-16-42	1	25,4	16	M42-2	30	50	33	82
0284-20-52	1.1/4	31,8	20	M52-2	38	60	39	105
0284-24-52	1.1/2	38,1	24	M52-2	38	60	44	150

0035 Femmina Metrica Cono 24° Serie Leggera Multiseal


(DKL) Metric Female 24° Seat Light Multiseal

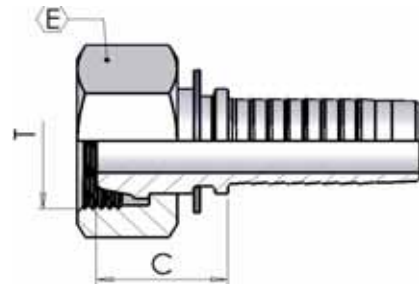

part number	hose I.D.		Dimension				
			dash size	thread	erm.	hex	cut-off
	in	mm		T		E	C
0035-03-12	3/16	4,8	03	M12-1.5	6	14	19
0035-03-16	3/16	4,8	03	M16-1.5	10	19	18
0035-04-14	1/4	6,4	04	M14-1.5	8	17	19
0035-04-16	1/4	6,4	04	M16-1.5	10	19	19
0035-05-16	5/16	7,9	05	M16-1.5	10	19	19
0035-05-18	5/16	7,9	05	M18-1.5	12	22	21
0035-06-18	3/8	9,5	06	M18-1.5	12	22	23
0035-06-22	3/8	9,5	06	M22-1.5	15	27	22
0035-08-22	1/2	12,7	08	M22-1.5	15	27	22
0035-08-26	1/2	12,7	08	M26-1.5	18	32	24
0035-10-26	5/8	15,9	10	M26-1.5	18	32	24

0135 Curva Metrica 90° Cono 24° Serie Leggera Multiseal


(DKL 90°) 90° Metric Swept Elbow 24° Seat Light Multiseal

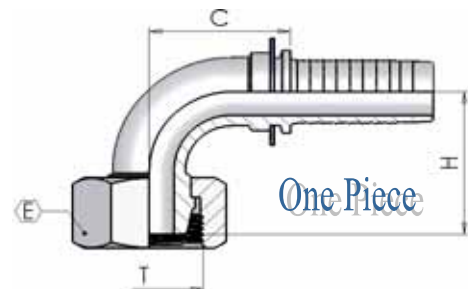

part number	hose I.D.		Dimension					
			dash size	thread	erm.	hex	drop	cut-off
	in	mm		T		E	H	C
0135-04-14	1/4	6,4	04	M14-1.5	8	17	25	25
0135-04-16	1/4	6,4	04	M16-1.5	10	19	24	26
0135-05-16	5/16	7,9	05	M16-1.5	10	19	29	32
0135-05-18	5/16	7,9	05	M18-1.5	12	22	30	31
0135-06-18	3/8	9,5	06	M18-1.5	12	22	33	32
0135-06-22	3/8	9,5	06	M22-1.5	15	27	34	33
0135-08-22	1/2	12,7	08	M22-1.5	15	27	38	41
0135-10-26	5/8	15,9	10	M26-1.5	18	32	42	46

0235 Curva Metrica 45° Cono 24° Serie Leggera Multiseal


(DKL 45°) 45° Metric Swept Elbow 24° Seat Light Multiseal

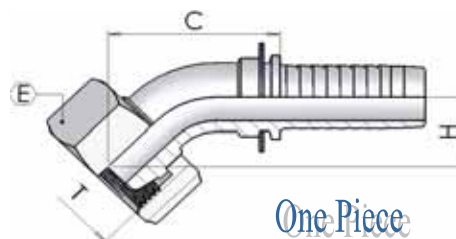

part number	hose I.D.		Dimension					
			dash	thread	erm.	hex	drop	cut-off
	in	mm	size	T		E	H	C
0235-04-12	1/4	6,4	04	M12-1.5	6	14	15	36
0235-04-14	1/4	6,4	04	M14-1.5	8	17	14	40
0235-04-16	1/4	6,4	04	M16-1.5	10	19	16	37
0235-05-16	5/16	7,9	05	M16-1.5	10	19	14	47
0235-05-18	5/16	7,9	05	M18-1.5	12	22	16	49
0235-06-18	3/8	9,5	06	M18-1.5	12	22	16	50
0235-08-22	1/2	12,7	08	M22-1.5	15	27	21	61

1350 Occhio a Pressare Metrico


(RNM) Metric Banjo

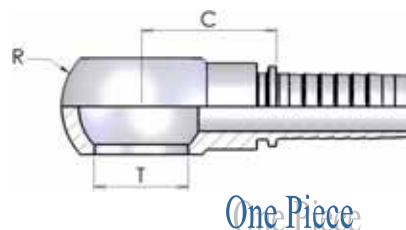

part number	hose I.D.		Dimension				
			dash	hole			cut-off
	in	mm	size	T	mm	R	C
1350-03-10	3/16	4,8	03	M10-1	10,2	17	19
1350-03-12	3/16	4,8	03	M12-1.5	12,2	20	21
1350-04-10	1/4	6,4	04	M10-1	10,2	17	25
1350-04-12	1/4	6,4	04	M12-1.5	12,2	20	22
1350-04-14	1/4	6,4	04	M14-1.5	14,2	24	25
1350-05-14	5/16	7,9	05	M14-1.5	14,2	24	25
1350-05-16	5/16	7,9	05	M16-1.5	16,2	28	31
1350-05-18	5/16	7,9	05	M18-1.5	18,2	32	29
1350-06-14	3/8	9,5	06	M14-1.5	14,2	24	25
1350-06-16	3/8	9,5	06	M16-1.5	16,2	28	31
1350-06-18	3/8	9,5	06	M18-1.5	18,2	32	29
1350-06-22	3/8	9,5	06	M22-1.5	22,2	36	31
1350-08-16	1/2	12,7	08	M16-1.5	16,2	28	30
1350-08-18	1/2	12,7	08	M18-1.5	18,2	32	29
1350-08-22	1/2	12,7	08	M22-1.5	22,2	36	31
1350-10-22	5/8	15,9	10	M22-1.5	22,2	36	31
1350-10-26	5/8	15,9	10	M26-1.5	26,2	45	38
1350-12-22	3/4	19	12	M22-1.5	22,2	36	32
1350-12-26	3/4	19	12	M26-1.5	26,2	45	38
1350-16-30	1	25,4	16	M30-1.5	30,2	54	45

0430 Maschio Metrico Svas.24° Serie Francese


(CEF) Metric Male 24° Cone French Type

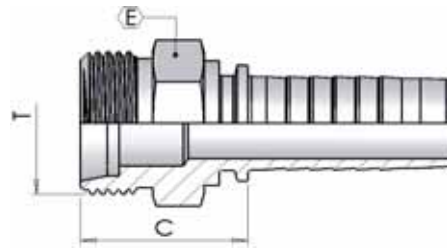

part number	hose I.D.		Dimension				
			dash	erm.	thread	hex	cut-off
	in	mm	size		T	E	C
0430-05-18	5/16	7,9	05	12,00	M18-1.5	19	26
0430-05-20	5/16	7,9	05	13,25	M20-1.5	22	26
0430-06-20	3/8	9,5	06	13,25	M20-1.5	22	26
0430-08-24	1/2	12,7	08	16,75	M24-1.5	24	28
0430-10-30	5/8	15,9	10	21,25	M30-1.5	32	31
0430-12-30	3/4	19	12	21,25	M30-1.5	32	32
0430-12-36	3/4	19	12	26,75	M36-1.5	36	33
0430-16-45	1	25,4	16	33,50	M45-1.5	46	38
0430-20-52	1.1/4	31,8	20		M52-1.5	55	41

0530 Estremità Tubolare Diritta Serie Francese


(BEF) Metric Standpipe French Type

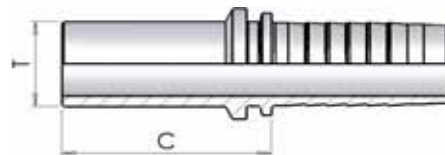

part number	hose I.D.		Dimension			
			dash	pipe		cut-off
	in	mm	size	T		C
0530-05-20	5/16	7,9	05	13,25		35
0530-06-20	3/8	9,5	06	13,25		37
0530-08-24	1/2	12,7	08	16,75		41
0530-10-30	5/8	15,9	10	21,25		40
0530-12-36	3/4	19	12	26,75		42
0530-16-45	1	25,4	16	33,50		43

0030 Femmina Metrica Cono 24° Serie Francese


(DKF) Metric Female 24° Cone French Type

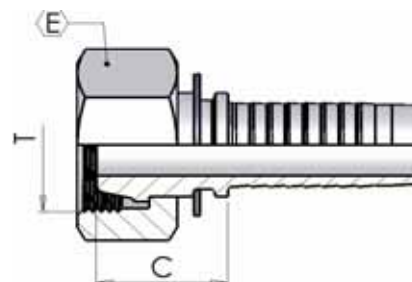

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0030-05-20	5/16	7,9	05	M20-1.5	24	25
0030-06-20	3/8	9,5	06	M20-1.5	24	26
0030-08-24	1/2	12,7	08	M24-1.5	30	28
0030-10-30	5/8	15,9	10	M30-1.5	36	25
0030-12-30	3/4	19	12	M30-1.5	36	26
0030-12-36	3/4	19	12	M36-1.5	46	29
0030-16-45	1	25,4	16	M45-1.5	55	30
0030-20-52	1.1/4	31,8	20	M52-1.5	65	34

0130 Curva Metrica 90° Cono 24° Serie Francese

(DKF 90°) 90° Metric Swept Elbow 24° Cone French Type

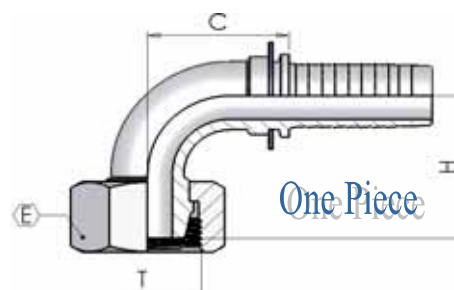


part number	hose I.D.		Dimension				
			dash size	thread	hex	drop	cut-off
	in	mm		T	E	H	C
0130-05-20	5/16	7,9	05	M20-1.5	24	35	29
0130-06-20	3/8	9,5	06	M20-1.5	24	35	33
0130-08-24	1/2	12,7	08	M24-1.5	30	40	43
0130-12-36	3/4	19	12	M36-1.5	46	55	56

saldata	0130S10-30	5/8	15,9	10	M30-1.5	36	49	48
---------	------------	-----	------	----	---------	----	----	----

0550 Femmina Metrica Tubolare Diritta


(BEL-BES) Metric Standpipe

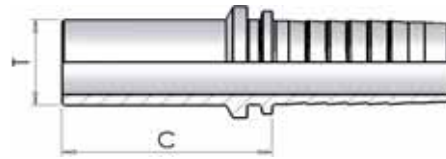

part number	hose I.D.		Dimension			
			dash size	pipe	type	cut-off
	in	mm		T		C
0550-03-06	3/16	4,8	03	6	L/S	30
0550-03-08	3/16	4,8	03	8	L/S	29
0550-04-06	1/4	6,4	04	6	L/S	32
0550-04-08	1/4	6,4	04	8	L/S	30
0550-04-10	1/4	6,4	04	10	L/S	33
0550-04-12	1/4	6,4	04	12	L/S	30
0550-05-08	5/16	7,9	05	08	L/S	31
0550-05-10	5/16	7,9	05	10	L/S	31
0550-05-12	5/16	7,9	05	12	L/S	33
0550-06-08	3/8	9,5	06	08	L/S	33
0550-06-10	3/8	9,5	06	10	L/S	33
0550-06-12	3/8	9,5	06	12	L/S	32
0550-06-14	3/8	9,5	06	14	S	37
0550-06-15	3/8	9,5	06	15	L	32
0550-08-12	1/2	12,7	08	12	L/S	36
0550-08-14	1/2	12,7	08	14	S	39
0550-08-15	1/2	12,7	08	15	L	34
0550-08-16	1/2	12,7	08	16	S	39
0550-08-18	1/2	12,7	08	18	L	35
0550-08-20	1/2	12,7	08	20	S	45
0550-10-18	5/8	15,9	10	18	L	35
0550-10-20	5/8	15,9	10	20	S	45
0550-10-22	5/8	15,9	10	22	L	33
0550-12-18	3/4	19	12	18	L	37
0550-12-20	3/4	19	12	20	S	46
0550-12-22	3/4	19	12	22	L	38
0550-12-25	3/4	19	12	25	S	49
0550-12-28	3/4	19	12	28	L	40
0550-16-25	1	25,4	16	25	S	51
0550-16-28	1	25,4	16	28	L	41
0550-16-30	1	25,4	16	30	S	54
0550-16-38	1	25,4	16	38	S	60
0550-20-30	1.1/4	31,8	20	30	S	58
0550-20-35	1.1/4	31,8	20	35	L	48
0550-20-38	1.1/4	31,8	20	38	S	62
0550-24-38	1.1/2	38,1	24	38	S	63
0550-24-42	1.1/2	38,1	24	42	L	50

0650 Femm. Metrica Tubolare 90°


(BEL-BES 90°) 90° Metric Standpipe

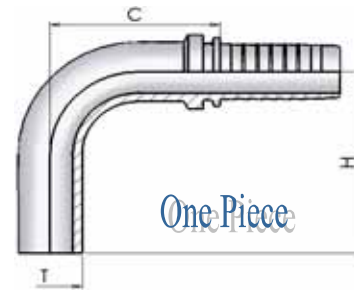

part number	hose I.D.		Dimension				
			dash size	pipe T	type	drop H	cut-off C
	in	mm					
0650-04-06	1/4	6,4	04	6	L/S	32	23
0650-04-08	1/4	6,4	04	8	L/S	34	25
0650-04-10	1/4	6,4	04	10	L/S	43	25
0650-05-10	5/16	7,9	05	10	L/S	40	29
0650-05-12	5/16	7,9	05	12	L/S	45	29
0650-06-10	3/8	9,5	06	10	L/S	40	27
0650-06-12	3/8	9,5	06	12	L/S	44	30

0650S Femmina Metrica Tubolare 90° (saldata)


(BEL-BES 90°) 90° Metric Standpipe (welded)

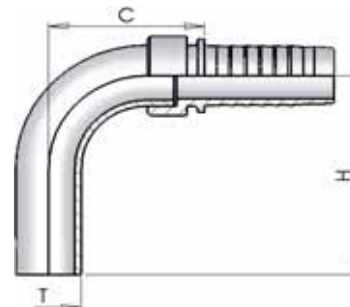

part number	hose I.D.		Dimension				
			dash size	pipe T	type	drop H	cut-off C
	in	mm					
0650S03-06	3/16	4,8	03	6	L/S	37	24
0650S03-08	3/16	4,8	03	8	L/S	41	25
0650S04-12	1/4	6,4	04	12	L/S	44	35
0650S05-08	5/16	7,9	05	8	L/S	41	27
0650S06-14	3/8	9,5	06	14	S	46	36
0650S06-15	3/8	9,5	06	15	L	52	39
0650S08-12	1/2	12,7	08	12	L/S	44	33
0650S08-14	1/2	12,7	08	14	S	46	36
0650S08-15	1/2	12,7	08	15	L	52	39
0650S08-16	1/2	12,7	08	16	S	56	42
0650S08-18	1/2	12,7	08	18	L	56	42
0650S10-18	5/8	15,9	10	18	L	56	42
0650S10-20	5/8	15,9	10	20	S	65	48
0650S10-22	5/8	15,9	10	22	L	71	51
0650S12-20	3/4	19	12	20	S	65	48
0650S12-22	3/4	19	12	22	L	71	51
0650S12-25	3/4	19	12	25	S	75	57
0650S16-25	1	25,4	16	25	S	75	57
0650S16-28	1	25,4	16	28	L	89	60
0650S16-30	1	25,4	16	30	S	89	65
0650S20-30	1.1/4	31,8	20	30	S	89	66
0650S20-35	1.1/4	31,8	20	35	L	98	76
0650S20-38	1.1/4	31,8	20	38	S	102	83
0650S24-38	1.1/2	38,1	24	38	S	102	82
0650S24-42	1.1/2	38,1	24	42	L	125	106

0750 Femm. Metrica Tubolare 45°

(BEL-BES 45°) 45° Metric Standpipe

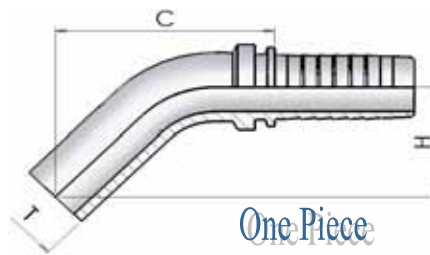


part number	hose I.D.		Dimension				
			dash	pipe	type	drop	cut-off
	in	mm	size	T		H	C
0750-04-06	1/4	6,4	04	6	L/S	24	41
0750-04-08	1/4	6,4	04	8	L/S	25	43
0750-04-10	1/4	6,4	04	10	L/S	30	47
0750-05-10	5/16	7,9	05	10	L/S	30	49
0750-05-12	5/16	7,9	05	12	L/S	32	53
0750-06-10	3/8	9,5	06	10	L/S	33	50
0750-06-12	3/8	9,5	06	12	L/S	33	52

0750S Femm. Metrica Tubolare 45° (saldata)

(BEL-BES 45°)


45° Metric Standpipe (welded)

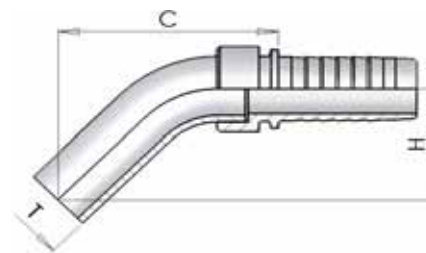

part number	hose I.D.		Dimension				
			dash	pipe	type	drop	cut-off
	in	mm	size	T		H	C
0750S03-06	3/16	4,8	03	6	L/S	21	38
0750S03-08	3/16	4,8	03	8	L/S	23	41
0750S04-12	1/4	6,4	04	12	L/S	29	54
0750S06-14	3/8	9,5	06	14	S	27	50
0750S06-15	3/8	9,5	06	15	L	29	54
0750S08-14	1/2	12,7	08	14	S	27	50
0750S08-15	1/2	12,7	08	15	L	29	55
0750S08-16	1/2	12,7	08	16	S	27	54
0750S08-18	1/2	12,7	08	18	L	29	56
0750S10-18	5/8	15,9	10	18	L	29	56
0750S10-20	5/8	15,9	10	20	S	34	56
0750S10-22	5/8	15,9	10	22	L	35	66
0750S12-20	3/4	19	12	20	S	34	63
0750S12-22	3/4	19	12	22	L	35	65
0750S12-25	3/4	19	12	25	S	41	76
0750S16-25	1	25,4	16	25	S	41	76
0750S16-28	1	25,4	16	28	L	49	84
0750S16-30	1	25,4	16	30	S	44	86
0750S20-30	1.1/4	31,8	20	30	S	44	88
0750S20-35	1.1/4	31,8	20	35	L	47	94
0750S20-38	1.1/4	31,8	20	38	S	50	101
0750S24-38	1.1/2	38,1	24	38	S	50	100
0750S24-42	1.1/2	38,1	24	42	L	55	114

FK50 Femmina Tipo 'K' per Idropulitrici


K' Female

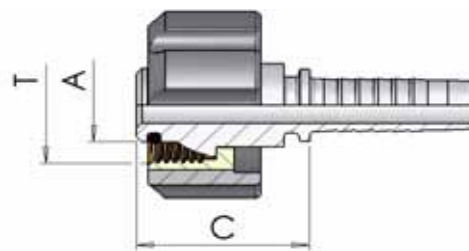

part number	hose I.D.		Dimension			
			dash size	thread		cut-off
	in	mm		T	A	C
FK50-04-22	1/4	6,4	04	M22-1.5	14	31
FK50-05-22	5/16	7,9	05	M22-1.5	14	31
FK50-06-22	3/8	9,5	06	M22-1.5	14	31

FN50 FN51 Inserti Tipo 'K' (per lancia)

'K' Male (for gun)

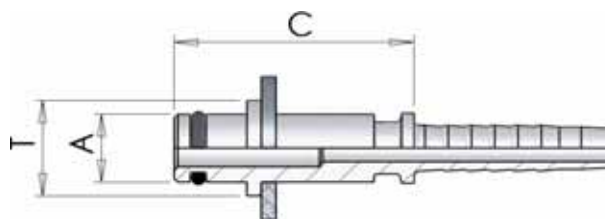


part number	hose I.D.		Dimension			
			dash size	thread		cut-off
	in	mm		T	A	C
FN50-04-22	1/4	6,4	04	M22-1.5	10	33
FN50-05-22	5/16	7,9	05	M22-1.5	10	33
FN50-06-22	3/8	9,5	06	M22-1.5	10	33
FN51-04-22	1/4	6,4	04	M22-1.5	11	33
FN51-05-22	5/16	7,9	05	M22-1.5	11	33
FN51-06-22	3/8	9,5	06	M22-1.5	11	33

0398 Maschio Steko

(STN)

Staplelock Male

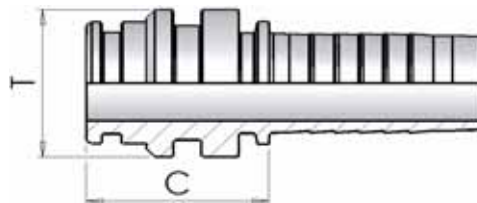

secondo / according to:
SAE J1467

part number	hose I.D.		Dimension			
			dash size	head		cut-off
	in	mm		T		C
0398-04-04	1/4	6,4	4	1/4		32
0398-06-06	3/8	9,5	06	3/8		35
0398-08-08	1/2	12,7	08	1/2		33
0398-10-10	5/8	15,9	10	5/8		33
0398-12-12	3/4	19	12	3/4		33
0398-16-16	1	25,4	16	1		39
0398-20-20	1.1/4	31,8	20	1.1/4		41


KO5B

Maschio Kobelco

KO5L

Kobelco Male

(KOB)

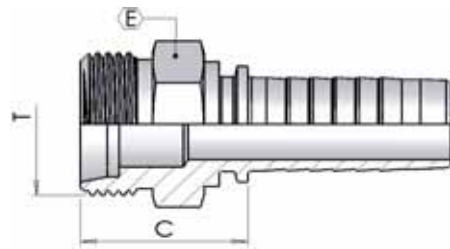


part number	hose I.D.		Dimension				
			dash size	thread	tube	hex	cut-off
	in	mm		T		E	C
KO5B-10-30	5/8	15,9	10	M30-1.5	22	32	32
KO5B-12-30	3/4	19	12	M30-1.5	22	32	35
KO5B-12-36	3/4	19	12	M36-1.5	28	41	36
KO5B-16-36	1	25,4	16	M36-1.5	28	41	37
KO5B-16-45	1	25,4	16	M45-1,5	35	50	38

0438

Maschio Metrico per valvole agricole

(CGM)


Metric Male For Agricultural Valves

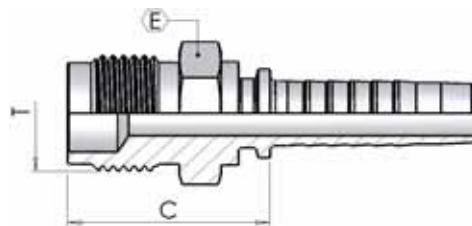

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
0438-04-18	1/4	6,4	04	M18-1.5	19	29
0438-05-18	5/16	7,9	05	M18-1.5	19	29
0438-06-18	3/8	9,5	06	M18-1.5	19	29

S350 Maschio ORFS

(ORFS) ORFS Male

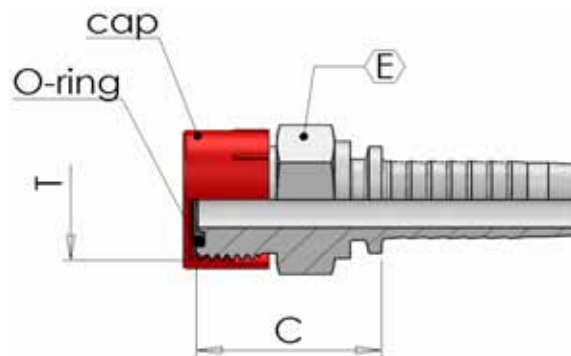


- con tappo ed O-Ring
- with cap and O-Ring

part number	hose I.D.		Dimension			
			dash size	thread T	hex E	cut-off C
S350-04-06-BO	1/4	6,4	04	9/16-18	17	23
S350-04-09-BO	1/4	6,4	04	11/16-16	19	21
S350-05-09-BO	5/16	7,9	05	11/16-16	19	26
S350-06-09-BO	3/8	9,5	06	11/16-16	19	26
S350-06-11-BO	3/8	9,5	6	13/16-16	22	29
S350-08-11-BO	1/2	12,7	08	13/16-16	22	29
S350-08-13-BO	1/2	12,7	08	1-14	27	34
S350-08-14-BO	1/2	12,7	08	1.3/16-12	32	35
S350-10-13-BO	5/8	15,9	10	1-14	27	33
S350-10-14-BO	5/8	15,9	10	1.3/16-12	32	35
S350-12-14-BO	3/4	19	12	1.3/16-12	32	36
S350-12-15-BO	3/4	19	12	1.7/16-12	38	36
S350-16-15-BO	1	25,4	16	1.7/16-12	38	37
S350-16-21-BO	1	25,4	16	1.11/16-12	46	38
S350-20-21-BO	1.1/4	31,8	20	1.11/16-12	46	39

S050 Femmina ORFS


(ORFS) ORFS Female

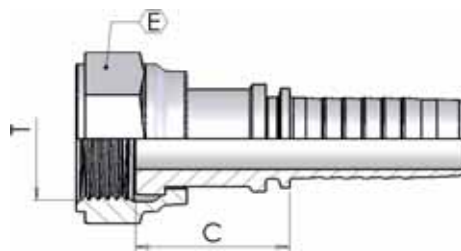

part number	hose I.D.		Dimension			
			dash size	thread	hex	cut-off
	in	mm		T	E	C
S050-04-06	1/4	6,4	04	9/16-18	19	25
S050-04-09	1/4	6,4	04	11/16-16	22	29
S050-04-11	1/4	6,4	04	13/16-16	24	32
S050-05-09	5/16	7,9	05	11/16-16	22	29
S050-06-09	3/8	9,5	06	11/16-16	22	29
S050-06-11	3/8	9,5	06	13/16-16	24	30
S050-08-11	1/2	12,7	08	13/16-16	24	32
S050-08-13	1/2	12,7	08	1-14	30	35
S050-08-14	1/2	12,7	08	1.3/16-12	36	37
S050-10-13	5/8	15,9	10	1-14	30	35
S050-10-14	5/8	15,9	10	1.3/16-12	36	34
S050-12-13	3/4	19	12	1-14	30	37
S050-12-14	3/4	19	12	1.3/16-12	36	35
S050-12-15	3/4	19	12	1.7/16-12	41	41
S050-16-15	1	25,4	16	1.7/16-12	41	39
Dado Libero S050-20-21	1.1/4	31,8	20	1.11/16-12	50	40
Dado Libero S050-24-32	1.1/2	38,1	24	2-12	60	41

S05T Femmina ORFS doppio esagono


(ORFS) ORFS Female Back Hexagon

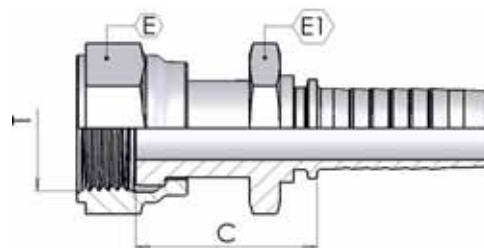

part number	hose I.D.		Dimension				
			dash size	thread	hex		cut-off
	in	mm		T	E	E1	C
S05T-04-06	1/4	6,4	04	9/16-18	19	15	30
S05T-06-09	3/8	9,5	06	11/16-16	22	17	34
S05T-08-11	1/2	12,7	08	13/16-16	24	19	37
S05T-10-13	5/8	15,9	10	1-14	30	24	41
S05T-12-14	3/4	19	12	1.3/16-12	36	30	42
S05T-16-15	1	25,4	16	1.7/16-12	41	36	50

S150 Curva ORFS 90°


(ORFS 90°) ORFS 90° Swept Elbow

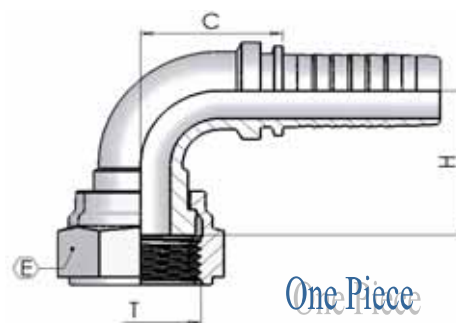

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
S150-04-06	1/4	6,4	04	9/16-18	19	26	25
S150-04-09	1/4	6,4	04	11/16-16	22	23	25
S150-05-09	5/16	7,9	05	11/16-16	22	32	29
S150-06-09	3/8	9,5	06	11/16-16	22	33	33
S150-06-11	3/8	9,5	06	13/16-16	24	32	33
S150-08-11	1/2	12,7	08	13/16-16	24	36	39
S150-08-13	1/2	12,7	08	1-14	30	40	39
S150-08-14	1/2	12,7	08	1.3/16-12	36	39	42
S150-10-13	5/8	15,9	10	1-14	30	39	47
saldata S150-10-14	5/8	15,9	10	1.3/16-12	36	39	42
saldata S150-12-13	3/4	19	12	1-14	30	39	42
S150-12-14	3/4	19	12	1.3/16-12	36	49	57
S150-12-15	3/4	19	12	1.7/16-12	41	51	56
S150-16-15	1	25,4	16	1.7/16-12	41	62	67
saldata S150-16-21	1	25,4	20	1.11/16-12	50	58	62
saldata S150-20-21	1.1/4	31,8	20	1.11/16-12	50	58	63
saldata S150-24-32	1.1/2	38,1	24	2-12	60	73	80

S250 Curva ORFS 45°


(ORFS 45°) ORFS 45° Swept Elbow

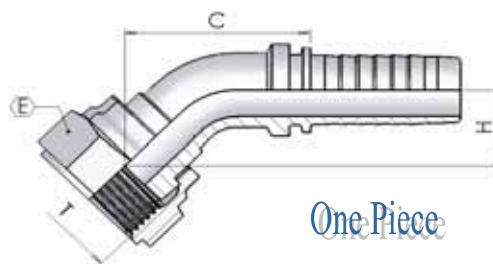

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
S250-04-06	1/4	6,4	04	9/16-18	19	14	40
S250-04-09	1/4	6,4	04	11/16-16	22	14	38
S250-05-09	5/16	7,9	05	11/16-16	22	14	44
S250-06-09	3/8	9,5	06	11/16-16	22	17	52
S250-06-11	3/8	9,5	06	13/16-16	24	18	51
S250-08-11	1/2	12,7	08	13/16-16	24	20	62
S250-08-13	1/2	12,7	08	1-14	30	23	64
S250-08-14	1/2	12,7	08	1.3/16-12	36	23	62
S250-10-13	5/8	15,9	10	1-14	30	22	67
saldata S250-10-14	5/8	15,9	10	1.3/16-12	36	18	44
saldata S250-12-13	3/4	19	12	1-14	30	15	40
S250-12-14	3/4	19	12	1.3/16-12	36	23	84
S250-12-15	3/4	19	12	1.7/16-12	41	26	84
S250-16-15	1	25,4	16	1.7/16-12	41	31	100
saldata S250-20-21	1.1/4	31,8	20	1.11/16-12	50	44	125
saldata S250-24-32	1.1/2	38,1	24	2-12	60	29	78

0920 Femmina JIS cono 60° (Nissan)


(JIS-N) JIS Female 60° cone (Nissan)

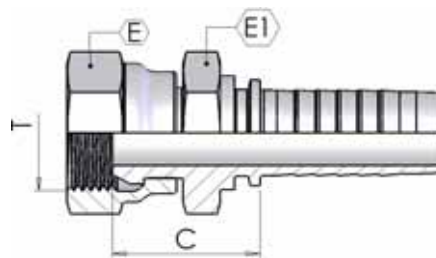

part number	hose I.D.		Dimension				
			dash size	thread	hex		cut-off
	in	mm		T	E	E1	C
0920-04-04	1/4	6,4	04	1/4-19	19	19	23
0920-06-06	3/8	9,5	06	3/8-19	22	22	28
0920-08-08	1/2	12,7	08	1/2-14	27	27	27
0920-12-12	3/4	19	12	3/4-14	32	32	29
0920-16-16	1	25,4	16	1-11	38	38	31

0930 Femmina JIS cono 60° (Toyota)


(JIS-T) JIS Female 60° cone (Toyota)

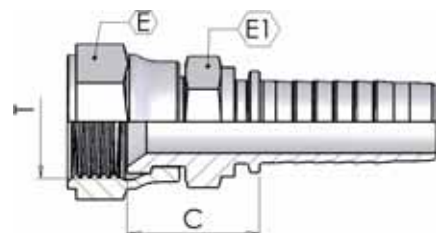

part number	hose I.D.		Dimension				
			dash size	thread	hex		cut-off
	in	mm		T	E	E1	C
0930-04-04	1/4	6,4	04	1/4-19	19	17	20
0930-06-06	3/8	9,5	06	3/8-19	22	19	22
0930-08-08	1/2	12,7	08	1/2-14	27	22	26
0930-12-12	3/4	19	12	3/4-14	32	30	29
0930-16-16	1	25,4	16	1-11	38	36	31
0930-20-20	1,1/4	31,8	20	1,1/4-11	50	46	35
0930-24-24	1,1/2	38,1	24	1,1/2-11	55	50	28

0980S Curva JIS 90° (Toyota) - saldata


(JIS-T 90°) 90° JIS Swept Elbow (Toyota) - welded

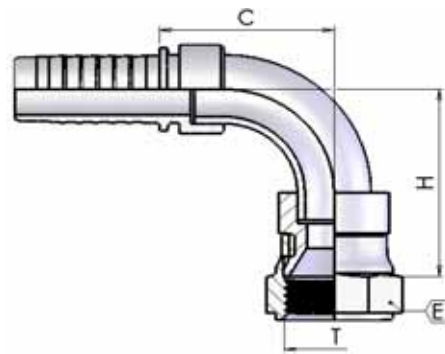

part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
0980S04-04	1/4	6,4	04	1/4-19	19	35	38
0980S06-06	3/8	9,5	06	3/8-19	22	30	27
0980S08-08	1/2	12,7	08	1/2-14	27	39	33
0980S12-12	3/4	19	12	3/4-14	32	55	48
0980S16-16	1	25,4	16	1-11	38	62	57
0980S20-20	1,1/4	31,8	20	1,1/4-11	50	65	63
0980S24-24	1,1/2	38,1	24	1,1/2-11	55	83	80

1030S Curva JIS 45° (Toyota) - saldata

(JIS-T 45°) 45° JIS Swept Elbow (Toyota) - welded

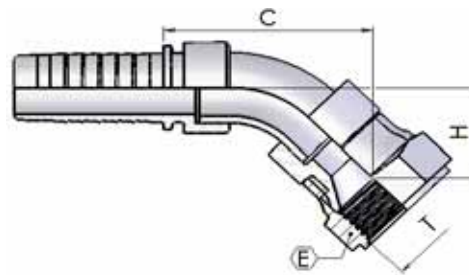


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
1030S04-04	1/4	6,4	04	1/4-19	19	18	44
1030S05-06	5/16	7,9	05	3/8-19	22	18	38
1030S06-06	3/8	9,5	06	3/8-19	22	18	38
1030S08-08	1/2	12,7	08	1/2-14	27	20	40
1030S12-12	3/4	19	12	3/4-14	32	26	56
1030S16-16	1	25,4	16	1-11	38	33	72
1030S20-20	1,1/4	31,8	20	1,1/4-11	50	29	67
1030S24-24	1,1/2	38,1	24	1,1/2-11	55	36	85

0940 Femmina JIS Cono 60° (Komatsu)

(JIS-K)

JIS Female 60° Cone (Komatsu)

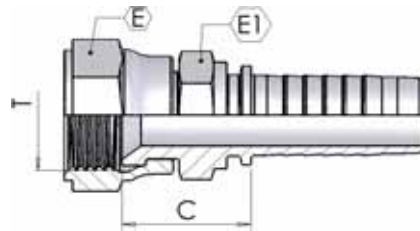


part number	hose I.D.		Dimension				
			dash size	thread	hex		cut-off
	in	mm		T	E	E1	C
0940-04-14	1/4	6,4	04	M14x1,5	19	17	22
0940-05-16	5/16	7,9	05	M16x1,5	22	17	22
0940-06-14	3/8	9,5	06	M14x1,5	19	17	22
0940-06-18	3/8	9,5	06	M18x1,5	24	19	21
0940-08-22	1/2	12,7	08	M22x1,5	27	22	27
0940-10-24	5/8	15,9	10	M24x1,5	30	27	26
0940-12-30	3/4	19	12	M30x1,5	36	30	30
0940-16-33	1	25,4	16	M33x1,5	41	36	33
0940-20-36	1.1/4	31,8	20	M36x1,5	46	46	37
0940-24-42	1.1/2	38,1	24	M42x1,5	50	50	38

0990S Curva 90° JIS Cono 60° (Komatsu) - saldata

(JIS-K 90°)


90° JIS Swept Elbow (Komatsu) - welded

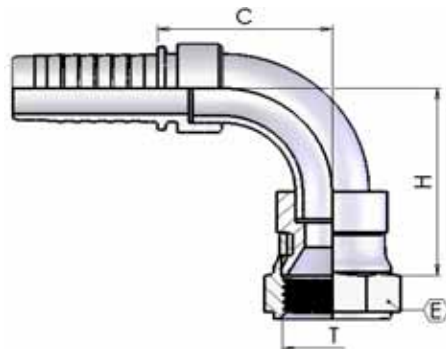

part number	hose I.D.		Dimension				
			dash size	thread	hex	drop	cut-off
	in	mm		T	E	H	C
0990S04-14	1/4	6,4	04	M14x1,5	19	35	38
0990S05-16	5/16	7,9	05	M16x1,5	22	30	27
0990S06-14	3/8	9,5	06	M14x1,5	19	33	31
0990S06-18	3/8	9,5	06	M18x1,5	24	33	31
0990S08-22	1/2	12,7	08	M22x1,5	27	39	33
0990S10-24	5/8	15,9	10	M24x1,5	30	48	42
0990S12-30	3/4	19	12	M30x1,5	36	43	48
0990S16-33	1	25,4	16	M33x1,5	41	62	57

1040S Curva 45° JIS Cono 60° (Komatsu) - (JIS-K 45°) saldada

45° JIS Swept Elbow (Komatsu) - welded

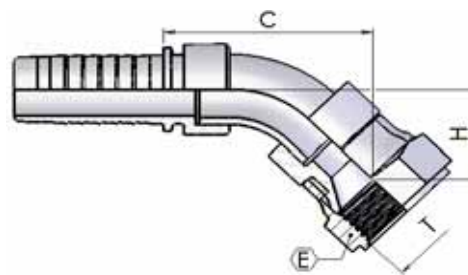


part number	hose I.D.		Dimension				
			dash	thread	hex	drop	cut-off
	in	mm	size	T	E	H	C
1040S04-14	1/4	6,4	04	M14x1,5	19	18	44
1040S05-16	5/16	7,9	05	M16x1,5	22	18	38
1040S06-14	3/8	9,5	06	M14x1,5	19	18	41
1040S06-18	3/8	9,5	06	M18x1,5	24	18	43
1040S08-22	1/2	12,7	08	M22x1,5	27	20	40
1040S10-24	5/8	15,9	10	M24x1,5	30	23	50
1040S12-30	3/4	19	12	M30x1,5	36	26	56
1040S16-33	1	25,4	16	M33x1,5	41	33	65

1250 Flangia Komatsu Diritta

(JIS-KF)

Komatsu Flange - Straight

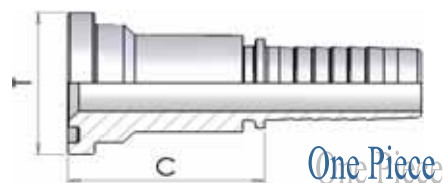


part number	hose I.D.		Dimension			
			dash size	flangia		cut-off
	in	mm		T	mm	C
1250-10-10	5/8	15,9	10	5/8	34	56

One Piece

1050 Flangia Komatsu 90°

(JIS-KF 90°)

Komatsu Flange - 90°

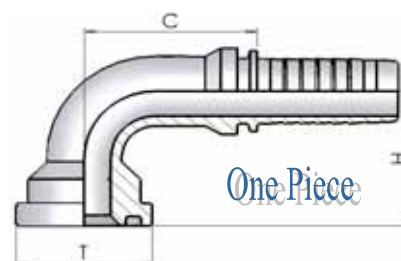


part number	hose I.D.		dash size	Dimension			
				flangia		drop	cut-off
	in	mm		T	mm	H	C
1050-10-10	5/8	15,9	10	5/8	34	47	48

One Piece

1150 Flangia Komatsu 45°

(JIS-KF 45°)

Komatsu Flange - 45°

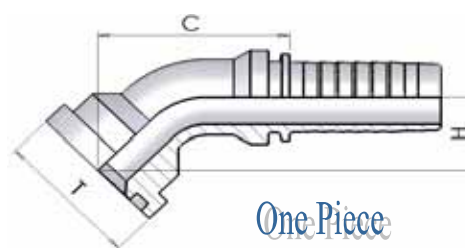


part number	hose I.D.		dash size	Dimension			
				flangia		drop	cut-off
	in	mm		T	mm	H	C
1150-10-10	5/8	15,9	10	5/8	34	54	23

One Piece

1260 Flangia Diritta SAE 3000 PSI

(SFL)

Straight SAE Flange 3000 PSI

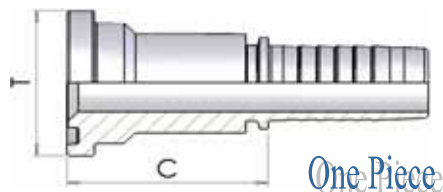


part number	hose I.D.		Dimension			
			dash size	flangia		cut-off
	in	mm		T	mm	C
1260-08-08	1/2	12,7	08	1/2	30,2	45
1260-08-12	1/2	12,7	08	3/4	38.1	50
1260-10-08	5/8	15,9	10	1/2	30,2	45
1260-10-12	5/8	15,9	10	3/4	38.1	49
1260-12-12	3/4	19	12	3/4	38.1	50
1260-12-16	3/4	19	12	1	44.5	53
1260-16-16	1	25,4	16	1	44.5	54
1260-16-20	1	25,4	16	1.1/4	50.8	57
1260-20-20	1.1/4	31,8	20	1.1/4	50.8	59
1260-20-24	1.1/4	31,8	20	1.1/2	60.3	62
1260-24-24	1.1/2	38,1	24	1.1/2	60.3	62
1260-24-32	1.1/2	38,1	24	2	71.4	67
1260-32-32	2	50,8	32	2	71.4	68
1260-32-40	2	50,8	32	2.1/2	84.1	76
1260-40-40	2.1/2	63,5	40	2.1/2	84,1	76
1260-48-48	3	76,2	48	3	101,6	63

1060 Flangia 90° SAE 3000 PSI

(SFL 90°)


90° SAE Flange 3000 PSI

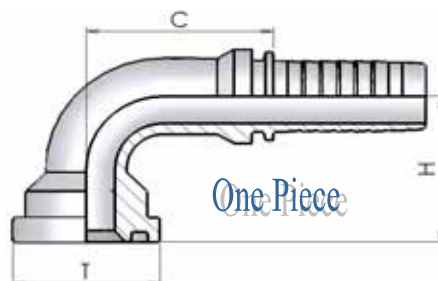

part number	hose I.D.		dash size	Dimension			
				flangia		drop	cut-off
	in	mm		T	mm	H	
1060-08-08	1/2	12,7	08	1/2	30,2	39	39
1060-08-12	1/2	12,7	08	3/4	38.1	44	39
1060-10-08	5/8	15,9	10	1/2	30,2	42	45
1060-10-12	5/8	15,9	10	3/4	38.1	47	45
1060-12-12	3/4	19	12	3/4	38.1	53	56
1060-12-16	3/4	19	12	1	44.5	58	56
1060-16-16	1	25,4	16	1	44.5	65	70
1060-16-20	1	25,4	16	1.1/4	50.8	70	70
1060-16-24	1	25,4	16	1.1/2	60.3	71	72
1060-20-20	1.1/4	31,8	20	1.1/4	50.8	77	86
1060-20-24	1.1/4	31,8	20	1.1/2	60.3	81	85
1060-24-24	1.1/2	38,1	24	1.1/2	60.3	89	98
1060-24-32	1.1/2	38,1	24	2	71.4	97	93
1060-32-32	2	50,8	32	2	71.4	121	123

1160 Flangia 45° SAE 3000 PSI


(SFL 45°) 45° SAE Flange 3000 PSI

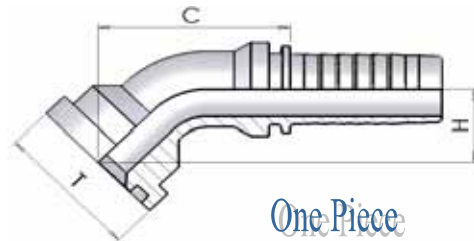

part number	hose I.D.		Dimension				
			dash size	flangia		drop	cut-off
	in	mm		T	mm	H	C
1160-08-08	1/2	12,7	08	1/2	30,2	22	62
1160-08-12	1/2	12,7	08	3/4	38.1	25	67
1160-12-12	3/4	19	12	3/4	38.1	27	69
1160-12-16	3/4	19	12	1	44.5	30	88
1160-16-16	1	25,4	16	1	44.5	33	82
1160-16-20	1	25,4	16	1.1/4	50.8	37	108
1160-20-20	1.1/4	31,8	20	1.1/4	50.8	38	102
1160-20-24	1.1/4	31,8	20	1.1/2	60.3	39	129
1160-24-24	1.1/2	38,1	24	1.1/2	60.3	45	113
1160-24-32	1.1/2	38,1	24	2	71.4	47	148
1160-32-32	2	50,8	32	2	71.4	58	130

1060 Flangia 22.5°/30°/60°/67.5° SAE 3000 PSI


22.5°/30°/60°/67.5° SAE Flange 3000 PSI

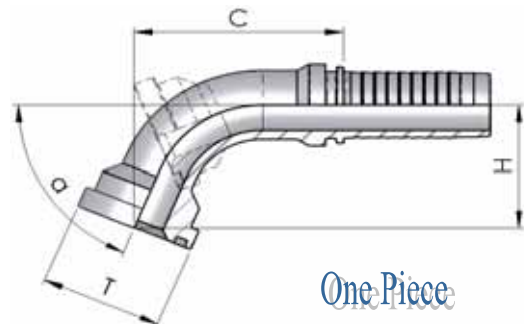

	part number	hose I.D.		Dimension					
				dash size	flangia		degrees	drop	cut-off
		in	mm		T	mm	a	H	C
(SFL 22.5°)	1060-12-12 22.5	3/4	19	12	3/4	38.1	22.5°	11	76
	1060-16-16 22.5	1	25,4	16	1	44.5		14	89
	1060-20-20 22.5	1.1/4	31,8	20	1.1/4	50.8		14	111
	1060-24-24 22.5	1.1/2	38,1	24	1.1/2	60.3		17	124
	1060-32-32 22.5	2	50,8	32	2	71.4		28	144
(SFL 30°)	1060-12-12 30	3/4	19	12	3/4	38.1	30°	16	75
	1060-16-16 30	1	25,4	16	1	44.5		19	87
	1060-20-20 30	1.1/4	31,8	20	1.1/4	50.8		26	109
	1060-24-24 30	1.1/2	38,1	24	1.1/2	60.3		23	122
	1060-32-32 30	2	50,8	32	2	71.4		35	142
(SFL 60°)	1060-12-12 60	3/4	19	12	3/4	38.1	60°	36	76
	1060-16-16 60	1	25,4	16	1	44.5		43	95
	1060-20-20 60	1.1/4	31,8	20	1.1/4	50.8		49	116
	1060-24-24 60	1.1/2	38,1	24	1.1/2	60.3		55	138
	1060-32-32 60	2	50,8	32	2	71.4		80	170
(SFL 67.5°)	1060-12-12 67.5	3/4	19	12	3/4	38.1	67.5°	41	72
	1060-16-16 67.5	1	25,4	16	1	44.5		48	91
	1060-20-20 67.5	1.1/4	31,8	20	1.1/4	50.8		56	110
	1060-24-24 67.5	1.1/2	38,1	24	1.1/2	60.3		63	131
	1060-32-32 67.5	2	50,8	32	2	71.4		92	158

1310 Flangia Diritta SAE 6000 PSI

(SFS) Straight SAE Flange 6000 PSI

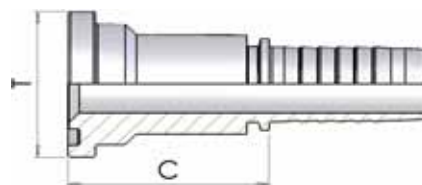


One Piece

part number	hose I.D.		Dimension			
			dash size	flangia		cut-off
	in	mm		T	mm	
1310-08-08	1/2	12,7	08	1/2	31,8	46
1310-08-12	1/2	12,7	08	3/4	41.3	53
1310-10-08	5/8	15,9	10	1/2	31,8	46
1310-10-12	5/8	15,9	10	3/4	41.3	53
1310-10-16	5/8	15,9	10	1	47.6	59
1310-12-12	3/4	19	12	3/4	41.3	54
1310-12-16	3/4	19	12	1	47.6	60
1310-16-12	1	25,4	16	3/4	41.3	55
1310-16-16	1	25,4	16	1	47.6	61
1310-16-20	1	25,4	16	1.1/4	54	68
1310-20-20	1.1/4	31,8	20	1.1/4	54	70
1310-20-24	1.1/4	31,8	20	1.1/2	63.5	76
1310-24-24	1.1/2	38,1	24	1.1/2	63.5	76
1310-24-32	1.1/2	38,1	24	2	79.4	85
1310-32-32	2	50,8	32	2	79.4	85

1110 Flangia 90° SAE 6000 PSI


(SFS 90°) 90° SAE Flange 6000 PSI

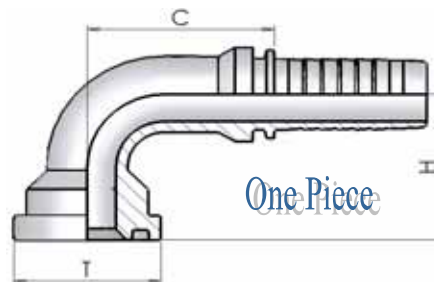

part number	hose I.D.		dash size	Dimension			
				flangia		drop	cut-off
	in	mm		T	mm	H	C
1110-08-08	1/2	12,7	08	1/2	31,8	39	39
1110-08-12	1/2	12,7	08	3/4	41.3	48	39
1110-10-08	5/8	15,9	10	1/2	31,8	42	45
1110-10-12	5/8	15,9	10	3/4	41.3	51	45
1110-10-16	5/8	15,9	10	1	47.6	56	45
1110-12-08	3/4	19	12	1/2	31,8	54	56
1110-12-12	3/4	19	12	3/4	41.3	55	56
1110-12-16	3/4	19	12	1	47.6	63	56
1110-16-12	1	25,4	16	3/4	41.3	64	68
1110-16-16	1	25,4	16	1	47.6	69	70
1110-16-20	1	25,4	16	1.1/4	54	74	71
1110-20-20	1.1/4	31,8	20	1.1/4	54	83	87
1110-20-24	1.1/4	31,8	20	1.1/2	63.5	90	87
1110-24-24	1.1/2	38,1	24	1.1/2	63.5	99	102
1110-24-32	1.1/2	38,1	24	2	79.4	108	103
1110-32-32	2	50,8	32	2	79.4	136	125

1210 Flangia 45° SAE 6000 PSI


(SFS 45°) 45° SAE Flange 6000 PSI

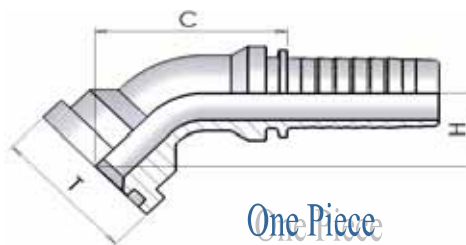

part number	hose I.D.		dash size	Dimension			
				flangia		drop	cut-off
	in	mm		T	mm	H	C
1210-08-08	1/2	12,7	08	1/2	31,8	22	62
1210-08-12	1/2	12,7	08	3/4	41.3	28	69
1210-10-08	5/8	15,9	10	1/2	31,8	21	66
1210-10-12	5/8	15,9	10	3/4	41.3	27	75
1210-10-16	5/8	15,9	10	1	47.6	32	77
1210-12-12	3/4	19	12	3/4	41.3	28	74
1210-12-16	3/4	19	12	1	47.6	32	90
1210-16-12	1	25,4	16	3/4	41.3	30	101
1210-16-16	1	25,4	16	1	47.6	34	86
1210-16-20	1	25,4	16	1.1/4	54	41	112
1210-20-20	1.1/4	31,8	20	1.1/4	54	43	107
1210-20-24	1.1/4	31,8	20	1.1/2	63.5	48	138
1210-24-24	1.1/2	38,1	24	1.1/2	63.5	50	122
1210-24-32	1.1/2	38,1	24	2	79.4	66	163
1210-32-32	2	50,8	32	2	79.4	61	145

FS3L Flangia 90° SAE 3000 PSI - Tipo Lungo


(SFL 90° L) 90° SAE Flange 3000 Psi - Long Drop

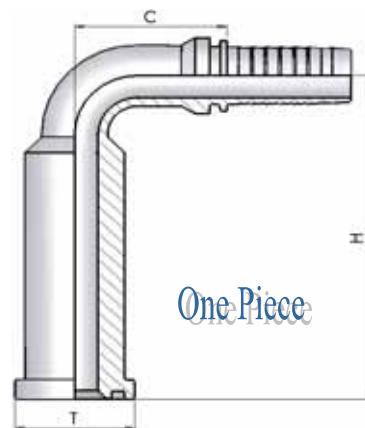

part number	hose I.D.		Dimension				
			dash size	flangia		drop	cut-off
	in	mm		T	mm	H	C
FS3L-08-08	1/2	12,7	08	1/2	30,2	73	39
FS3L-12-12	3/4	19	12	3/4	38.1	123	56
FS3L-16-16	1	25,4	16	1	44.5	127	70
FS3L-20-20	1.1/4	31,8	20	1.1/4	50.8	178	85
FS3L-24-24	1.1/2	38,1	24	1.1/2	60.3	220	99

FS6L Flangia 90° SAE 6000 PSI - Tipo Lungo

(SFS 90° L) 90° SAE Flange 6000 Psi - Long Drop

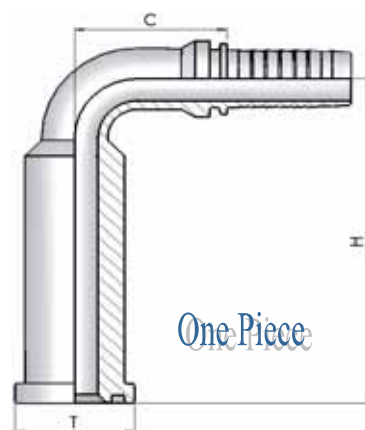


part number	hose I.D.		Dimension				
			dash size	flangia		drop	cut-off
	in	mm		T	mm	H	C
FS6L-08-08	1/2	12,7	08	1/2	31,8	75	40
FS6L-12-12	3/4	19	12	3/4	41.3	126	56
FS6L-16-16	1	25,4	16	1	47.6	132	70
FS6L-20-20	1.1/4	31,8	20	1.1/4	54	185	82
FS6L-24-24	1.1/2	38,1	24	1.1/2	63.5	233	99

130S Flangia Diritta SUPERCAT

(SFC)

Straight 'CAT' Flange

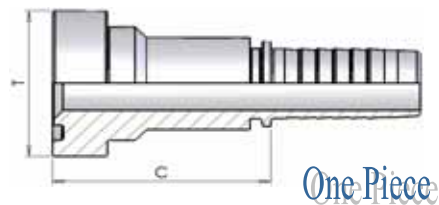


part number	hose I.D.		Dimension			
			dash size	flangia		cut-off C
	in	mm		T	mm	
130S-12-12	3/4	19	12	3/4	41.3	58
130S-12-16	3/4	19	12	1	47.6	64
130S-16-16	1	25,4	16	1	47.6	65
130S-16-20	1	25,4	16	1.1/4	54	73
130S-20-20	1.1/4	31,8	20	1.1/4	54	74
130S-20-24	1.1/4	31,8	20	1.1/2	63.5	78
130S-24-24	1.1/2	38,1	24	1.1/2	63.5	80

110S Flangia 90° SUPERCAT

(SFC 90°)

90° 'CAT' Flange

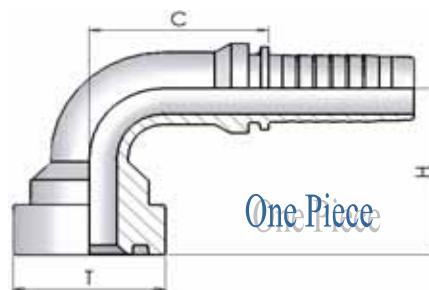


part number	hose I.D.		Dimension				
			dash size	flangia		drop H	cut-off C
	in	mm		T	mm		
110S-12-12	3/4	19	12	3/4	41.3	62	56
110S-12-16	3/4	19	12	1	47.6	65	56
110S-16-16	1	25,4	16	1	47.6	74	78
110S-16-20	1	25,4	16	1.1/4	54	80	78
110S-20-20	1.1/4	31,8	20	1.1/4	54	90	97
110S-20-24	1.1/4	31,8	20	1.1/2	63.5	97	96
110S-24-24	1.1/2	38,1	24	1.1/2	63.5	104	115

120S Flangia 45° SUPERCAT

(SFC 45°)

45° 'CAT' Flange

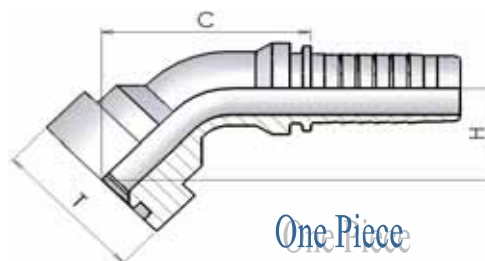


part number	hose I.D.		Dimension				
			dash size	flangia		drop H	cut-off C
	in	mm		T	mm		
120S-12-12	3/4	19	12	3/4	41.3	32	88
120S-12-16	3/4	19	12	1	47.6	37	93
120S-16-16	1	25,4	16	1	47.6	40	118
120S-16-20	1	25,4	16	1.1/4	54	44	122
120S-20-20	1.1/4	31,8	20	1.1/4	54	44	146
120S-20-24	1.1/4	31,8	20	1.1/2	63.5	48	149
120S-24-24	1.1/2	38,1	24	1.1/2	63.5	52	172

INBK **Inserto Semilavorato**

Blank Insert


trattamento superficiale: non zincato
surface treatment: without zinc plating

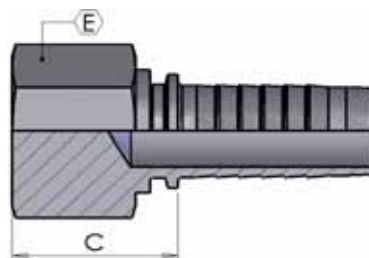

part number	hose I.D.		dash size	Dimension		
					hex E	cut-off C
INBK-04	1/4	6,4	04		19	28
INBK-06	3/8	9,5	06		22	23
INBK-08	1/2	12,7	08		27	29
INBK-10	0,625	15,9	10		30	31
INBK-12	3/4	19	12		32	33
INBK-16	1	25,4	16		38	36
INBK-20	1.1/4	31,8	20		50	41
INBK-24	1.1/2	38,1	24		55	43
INBK-32	2	50,8	32		65	45

D050 **Giunzione per Tubi Flessibili**


Hose Junction

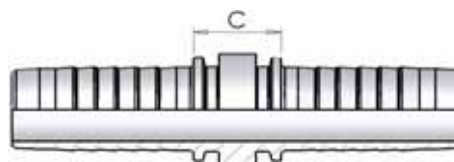

part number	hose I.D.		dash size	Dimension		
						cut-off C
D050-03	3/16	4,8	03			17
D050-04	1/4	6,4	04			17
D050-05	5/16	7,9	05			17
D050-06	3/8	9,5	06			17
D050-08	1/2	12,7	08			18
D050-10	5/8	15,9	10			18
D050-12	3/4	19	12			19
D050-16	1	25,4	16			21
D050-20	1.1/4	31,8	20			24
D050-24	1.1/2	38,1	24			24
D050-32	2	50,8	32			26

GS00 Gambo a Saldare

Weldable Fitting

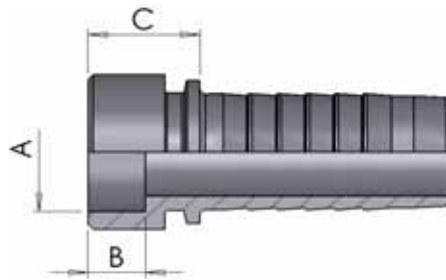

trattamento superficiale: non zincato
surface treatment: without zinc plating

part number	hose I.D.		dash size	Dimension		
	in	mm		A	B	cut-off
GS00-03-06	3/16	4,8	03	06	6	12
GS00-03-08	3/16	4,8	03	08	6	12
GS00-04-06	1/4	6,4	04	06	6	14
GS00-04-08	1/4	6,4	04	08	6	14
GS00-04-10	1/4	6,4	04	10	6	15
GS00-04-12	1/4	6,4	04	12	7	17
GS00-05-08	5/16	7,9	05	08	6	14
GS00-05-10	5/16	7,9	05	10	6	14
GS00-05-12	5/16	7,9	05	12	6	14
GS00-06-06	3/8	9,5	06	06	6	15
GS00-06-08	3/8	9,5	06	08	6	15
GS00-06-10	3/8	9,5	06	10	6	14
GS00-06-12	3/8	9,5	06	12	7	15
GS00-06-14	3/8	9,5	06	14	8	15
GS00-06-15	3/8	9,5	06	15	7	14
GS00-08-12	1/2	12,7	08	12	7	15
GS00-08-14	1/2	12,7	08	14	8	15
GS00-08-15	1/2	12,7	08	15	7	15
GS00-08-16	1/2	12,7	08	16	7	15
GS00-08-18	1/2	12,7	08	18	7	15
GS00-08-20	1/2	12,7	08	20	9	18
GS00-10-12	5/8	15,9	10	12	7	15
GS00-10-16	5/8	15,9	10	16	8	16
GS00-10-18	5/8	15,9	10	18	8	16
GS00-10-20	5/8	15,9	10	20	9	18
GS00-10-22	5/8	15,9	10	22	9	18
GS00-12-16	3/4	19	12	16	8	16
GS00-12-18	3/4	19	12	18	8	16
GS00-12-20	3/4	19	12	20	9	18
GS00-12-22	3/4	19	12	22	9	18
GS00-12-25	3/4	19	12	25	9	19
GS00-12-32	3/4	19	12	32	9	20
GS00-16-25	1	25,4	16	25	9	19
GS00-16-28	1	25,4	16	28	9	20
GS00-16-30	1	25,4	16	30	9	20
GS00-16-32	1	25,4	16	32	9	20
GS00-16-38	1	25,4	16	38	11	26
GS00-20-30	1.1/4	31,8	20	30	9	21
GS00-20-32	1.1/4	31,8	20	32	9	21
GS00-20-35	1.1/4	31,8	20	35	11	23
GS00-20-38	1.1/4	31,8	20	38	11	24
GS00-24-32	1.1/2	38,1	24	32	9	23
GS00-24-38	1.1/2	38,1	24	38	11	23
GS00-24-42	1.1/2	38,1	24	42	10	23
GS00-24-50	1.1/2	38,1	24	50	10	23
GS00-32-50	2	50,8	32	50	10	23